

SERIES 200 GLAMYS 220



HOMOLOGATED SEATS	6
BERTHS	8
SEATS AT THE TABLE	4



PACK

200 SERIES OVERCAB PACK

- White bumper
- Seat covers
- TV arm

200 SERIES OVERCAB PACK FORD

- 155 HP HEAVY DUTY
- White bumper
- Seat covers
- TV arm

EXPO PACK

- Solar panel
- Rear-view camera
- Pleated blind

TRAVEL FIAT PACK

200 SERIES PACK required

- 16" alloy wheel rims
- Skid plate, grille, black headlamp surround
- Traction+
- Fog lights

TRAVEL CITROËN PACK

200 SERIES PACK required

- 16" alloy wheel rims Traction+
- Fog lights

PACK MATIC FIAT - TRAVEL FIAT PACK AND 200 SERIES PACK required

- Automatic transmission
- 7" touch screen radio Android Auto / Apple Car Play

PACK MATIC FORD - 200 SERIES PACK FORD required

- Automatic transmission
- 9" touch screen radio Android Auto / Apple Car Play

EXTRA WARM PACK




- Step insulation
- Winter Pack
- Floor heating
- COMBI 6 E heater (CP Plus - OPT required)


SERIES 200 DIGITAL/SATELLITE TV PACK TV arm required - OPT on Glamys and Mc4

- 24" TV
- Digital/Satellite aerial

* Window in the bathroom without blind and mosquito net

S= standard O=optional VTR= Fibreglas MTS= multi-layered plywood
The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

Chassis			
Engine, Power	2,2 MJ 140 HP	2,2 140 HP	2,0 TDI 130 HP
Maximum technically permissible weight (kg)	3500	3500	3500
Weight unladen in running conditions Min / Max (kg)	2908 / 2992	2908 / 2992	2915 / 2992
Pay Load Min / Max (kg)	592 / 508	592 / 508	585 / 508
Wheelbase (mm)	3800	3800	3750
Maximum towable weight (kg)	2000	2000	2000
Wheels dimensions	15"	15"	16"
Manual air conditioning	S	S	S
Driver and Passenger airbag	S	S	S
Cruise Control with speed limiter	S	S	S
ABS / ESC	S/S	S/S	S/S
Bluetooth radio / Steering wheel radio controls	O/O	O/O	S/S
Dimensions and places			
External lenght (mm) / External width (mm)	6990 / 2350		
External height(cm) / Internal height (cm)	320 / 208		
Auxiliary bed in dinette	S		
Rear Bed (cm)	206x106 - 217x137(123)		
Dimensions Auxiliary bed in Dinette (cm)	180x121		
Overcab bed (cm)	209x160		
Locker (useful opening, cm)	115x95		
Max. internal garage height (cm)	134		
Floor / walls / roof thickness (cm)	5,4 / 3 / 3		
Floor / walls / roof material	MTS / VTR / VTR		
Fiberglass roof, hail-proof	S		
Installations			
Burners	2		
Tank capacity : clear water / wastewater (l)	20(110) / 100		20(110) / 120
Automatic trivalent fridge (220V, 12V, gas) (l)	135		
Standard heating system	Combi Gas 4 kW		
Space for 2 gas bottles (tot. Max 15 kg)	S		
Bathroom window (double opaque glass)	S		
Shower tray with double drain	S		
Integrated entry step	S		
Heated garage locker	S		
Skylight			
Rear skylight (mm)	S (400x400) / O (700x500)		
Central skylight (mm)	S (400x400)		
Dinette skylight (mm)	S (400x400) / O (700x500)		
Double-glazed windows with blind / mosquito net*	S		
Equipments			
Thermal blind	S		
Beds with staves	S		
Internal LED lightening	S		
Exteriors			
Flyscreen for entrance door	S		
XL Entrance door	S		
External LED light	S		

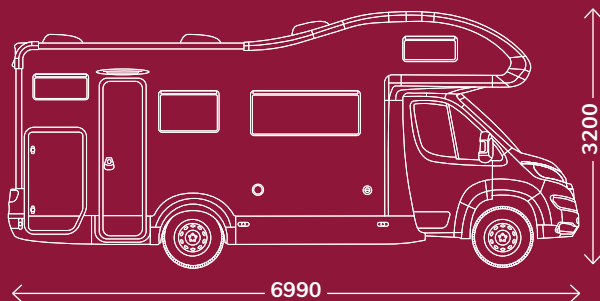

SERIES 200 GLAMYS 222



HOMOLOGATED SEATS	7
BERTHS	7
SEATS AT THE TABLE	6



PACK

200 SERIES OVERCAB PACK

- White bumper
- Seat covers
- TV arm

200 SERIES OVERCAB PACK FORD

- 155 HP HEAVY DUTY
- White bumper
- Seat covers
- TV arm

EXPO PACK

- Solar panel
- Rear-view camera
- Pleated blind

TRAVEL FIAT PACK

200 SERIES PACK required

- 16" alloy wheel rims
- Skid plate, grille, black headlamp surround
- Traction+
- Fog lights

TRAVEL CITROËN PACK

200 SERIES PACK required

- 16" alloy wheel rims Traction+
- Fog lights

PACK MATIC FIAT - TRAVEL FIAT PACK AND 200 SERIES PACK required

- Automatic transmission
- 7" touch screen radio Android Auto / Apple Car Play

PACK MATIC FORD - 200 SERIES PACK FORD required

- Automatic transmission
- 9" touch screen radio Android Auto / Apple Car Play

EXTRA WARM PACK

- Step insulation
- Winter Pack
- Floor heating
- COMBI 6 E heater (CP Plus - OPT required)




SERIES 200 DIGITAL/SATELLITE TV PACK


TV arm required - OPT on Glamys and Mc4

- 24" TV
- Digital/Satellite aerial

* Window in the bathroom without blind and mosquito net

S= standard O=optional VTR= Fibreglas MTS= multi-layered plywood
The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

Chassis			
Engine, Power	2,2 MJ 140 HP	2,2 140 HP	20TDI 130HP
Maximum technically permissible weight (kg)	3500	3500	3500
Weight unladen in running conditions Min / Max (kg)	2878 / 2907	2878 / 2907	2890 / 2907
Pay Load Min / Max (kg)	622 / 593	622 / 593	610 / 593
Wheelbase (mm)	3800	3800	3750
Maximum towable weight (kg)	2000	2000	2000
Wheels dimensions	15"	15"	16"
Manual air conditioning	S	S	S
Driver and Passenger airbag	S	S	S
Cruise Control with speed limiter	S	S	S
ABS / ESC	S/S	S/S	S/S
Bluetooth radio / Steering wheel radio controls	O	O	S/S
Dimensions and places			
External lenght (mm) / External width (mm)	6990 / 2350		
External height(cm) / Internal height (cm)	320 / 208		
Auxiliary bed in dinette	S		
Rear Bed (cm)	212x87(74) - 212x87(74)		
Dimensions Auxiliary bed in Dinette (cm)	180x121 - 140x64		
Overcab bed (cm)	209x160		
Locker (useful opening, cm)	125x70 - 125x60		
Max. internal garage height (cm)	138		
Floor / walls / roof thickness (cm)	5,4 / 3 / 3		
Floor / walls / roof material	MTS / VTR / VTR		
Fiberglass roof, hail-proof	S		
Installations			
Burners	2		
Tank capacity : clear water / wastewater (l)	20(118) / 100		20(118) / 120
Automatic trivalent fridge (220V, 12V, gas) (l)	135		
Standard heating system	Combi Gas 4 kW		
Space for 2 gas bottles (tot. Max 15 kg)	S		
Bathroom window (double opaque glass)	S		
Integrated entry step	S		
Heated garage locker	S		
Skylight			
Rear skylight (mm)	S (400x400)		
Central skylight (mm)	S (400x400)		
Dinette skylight (mm)	S (400x400) / O (700x500)		
Double-glazed windows with blind / mosquito net*	S		
Equipments			
Thermal blind	S		
Beds with staves	S		
Internal LED lightening	S		
Exteriors			
Flyscreen for entrance door	S		
External LED light	S		

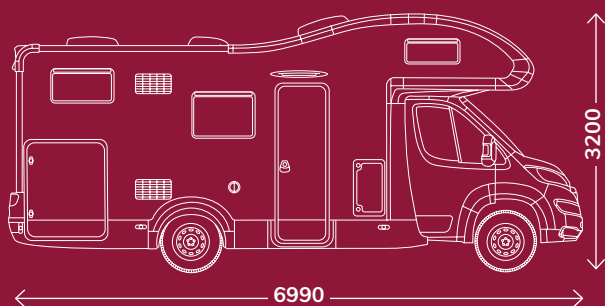

SERIES 200 GLAMYS 226



HOMOLOGATED SEATS	6
BERTHS	6
SEATS AT THE TABLE	4



PACK

200 SERIES OVERCAB PACK

- White bumper
- Seat covers
- TV arm

200 SERIES OVERCAB PACK FORD

- 155 HP HEAVY DUTY
- White bumper
- Seat covers
- TV arm

EXPO PACK

- Solar panel
- Rear-view camera
- Pleated blind

TRAVEL FIAT PACK

200 SERIES PACK required

- 16" alloy wheel rims
- Skid plate, grille, black headlamp surround
- Traction+
- Fog lights

TRAVEL CITROËN PACK

200 SERIES PACK required

- 16" alloy wheel rims Traction+
- Fog lights

PACK MATIC FIAT - TRAVEL FIAT PACK AND 200 SERIES PACK required

- Automatic transmission
- 7" touch screen radio Android Auto / Apple Car Play

PACK MATIC FORD - 200 SERIES PACK FORD required

- Automatic transmission
- 9" touch screen radio Android Auto / Apple Car Play

EXTRA WARM PACK

- Step insulation
- Winter Pack
- Floor heating
- COMBI 6 E heater (CP Plus - OPT required)

SERIES 200 DIGITAL/SATELLITE TV PACK


TV arm required - OPT on Glamys and Mc4

- 24" TV
- Digital/Satellite aerial

Chassis			
Engine, Power	2,2 MJ 140 HP	2,2 140 HP	2,0 TDI 130 HP
Maximum technically permissible weight (kg)	3500	3500	3500
Weight unladen in running conditions Min / Max (kg)	2908 / 2992	2908 / 2992	2915 / 2992
Pay Load Min / Max (kg)	592 / 508	592 / 508	585 / 508
Wheelbase (mm)	3800	3800	3750
Maximum towable weight (kg)	2000	2000	2000
Wheels dimensions	15"	15"	16"
Manual air conditioning	S	S	S
Driver and Passenger airbag	S	S	S
Cruise Control with speed limiter	S	S	S
ABS / ESC	S/S	S/S	S/S
Bluetooth radio / Steering wheel radio controls	O/O	O/O	S/S
Dimensions and places			
External length (mm) / External width (mm)	6990 / 2350		
External height(cm) / Internal height (cm)	320 / 208		
Auxiliary bed in dinette	S		
Rear Bed (cm)	201x128(115)		
Rear bed height adjustment	S		
Dimensions Auxiliary bed in Dinette (cm)	180x121		
Overcab bed (cm)	209x160		
Locker (useful opening, cm)	115x95		
Max. internal garage height (cm)	120		
Floor / walls / roof thickness (cm)	5,4 / 3 / 3		
Floor / walls / roof material	MTS / VTR / VTR		
Fiberglass roof, hail-proof	S		
Installations			
Burners	2		
Tank capacity : clear water / wastewater (l)	20(110) / 100		20(110) / 120
Automatic trivalent fridge (220V, 12V, gas) (l)	135		
Standard heating system	Combi Gas 4 kW		
Space for 2 gas bottles (tot. Max 15 kg)	S		
Bathroom window (double opaque glass)	S		
Shower tray with double drain	S		
Integrated entry step	S		
Heated garage locker	S		
Skylight			
Rear skylight (mm)	S (400x400) / O (700x500)		
Central skylight (mm)	S (400x400)		
Dinette skylight (mm)	S (400x400) / O (700x500)		
Double-glazed windows with blind / mosquito net	S		
Equipments			
Thermal blind	S		
Beds with staves	S		
Internal LED lightening	S		
Exteriors			
Flyscreen for entrance door	S		
XL Entrance door	S		
External LED light	S		

* Window in the bathroom without blind and mosquito net

S= standard O=optional VTR= Fiberglass MTS= multi-layered plywood
The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

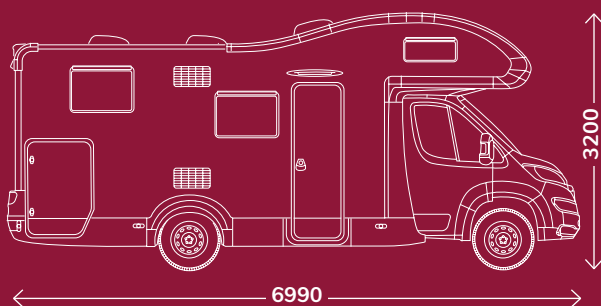

SERIES 200 GLAMYS 265



HOMOLOGATED SEATS	5
BERTHS	5
SEATS AT THE TABLE	5



PACK

200 SERIES OVERCAB PACK

- White bumper
- Seat covers
- TV arm

200 SERIES OVERCAB PACK FORD

- 155 HP HEAVY DUTY
- White bumper
- Seat covers
- TV arm

EXPO PACK

- Solar panel
- Rear-view camera
- Pleated blind

TRAVEL FIAT PACK

200 SERIES PACK required

- 16" alloy wheel rims
- Skid plate, grille, black headlamp surround
- Traction+
- Fog lights

TRAVEL CITROËN PACK

200 SERIES PACK required

- 16" alloy wheel rims Traction+
- Fog lights

PACK MATIC FIAT - TRAVEL FIAT PACK AND 200 SERIES PACK required

- Automatic transmission
- 7" touch screen radio Android Auto / Apple Car Play

PACK MATIC FORD - 200 SERIES PACK FORD required

- Automatic transmission
- 9" touch screen radio Android Auto / Apple Car Play




EXTRA WARM PACK

- Step insulation
- Winter Pack
- Floor heating
- COMBI 6 E heater (CP Plus - OPT required)

SERIES 200 DIGITAL/SATELLITE TV PACK


TV arm required - OPT on Glamys and Mc4

- 24" TV
- Digital/Satellite aerial

Chassis			
Engine, Power	2,2 MJ 140 HP	2,2 140 HP	2,0 TDI 130 HP
Maximum technically permissible weight (kg)	3500	3500	3500
Weight unladen in running conditions Min / Max (kg)	2958 / 3077	2958 / 3077	2965 / 3077
Pay Load Min / Max (kg)	542 / 423	542 / 423	535 / 423
Wheelbase (mm)	3800	3800	3750
Maximum towable weight (kg)	2000	2000	2000
Wheels dimensions	15"	15"	16"
Manual air conditioning	S	S	S
Driver and Passenger airbag	S	S	S
Cruise Control with speed limiter	S	S	S
ABS / ESC	S/S	S/S	S/S
Driver and passenger swivelling seats	S	S	S
Bluetooth radio / Steering wheel radio controls	O/O	O/O	S/S
Dimensions and places			
External lenght (mm) / External width (mm)	6990 / 2350		
External height(cm) / Internal height (cm)	320 / 208		
Auxiliary bed in dinette	S		
Rear Bed (cm)	185x80 - 195x80-182x215		
Dimensions Auxiliary bed in Dinette (cm)	216x120(43)		
Overcab bed (cm)	209x160		
Additional seat rear bed	S		
Locker (useful opening, cm)	115x80		
Max. internal garage height (cm)	121		
Floor / walls / roof thickness (cm)	5,4 / 3 / 3		
Floor / walls / roof material	MTS / VTR / VTR		
Fiberglass roof, hail-proof	S		
Installations			
Burners	2		
Tank capacity : clear water / wastewater (l)	20(115) / 100		20(115) / 120
Automatic trivalent fridge (220V, 12V, gas) (l)	135		
Standard heating system	Combi Gas 4 kW		
Space for 2 gas bottles (tot. Max 15 kg)	S		
Bathroom window (double opaque glass)	S		
Integrated entry step	S		
Heated garage locker	S		
Skylight			
Rear skylight (mm)	S (400x400) / O (700x500)		
Central skylight (mm)	S (400x400)		
Dinette skylight (mm)	S (400x400) / O (700x500)		
Double-glazed windows with blind / mosquito net *	S		
Equipments			
Thermal blind	S		
Beds with staves	S		
Internal LED lightening	S		
Exteriors			
Flyscreen for entrance door	S		
XL Entrance door	S		
External LED light	S		

* Window in the bathroom without blind and mosquito net

S= standard O=optional VTR= Fiberglass MTS= multi-layered plywood
The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

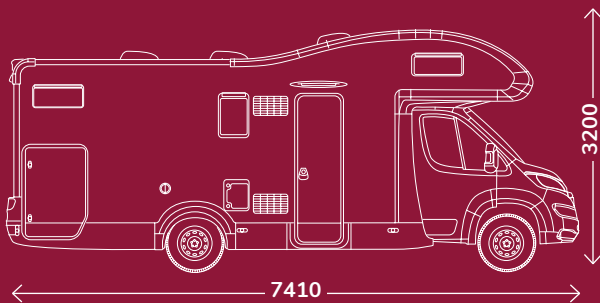

SERIES 200 GLAMYS 223



HOMOLOGATED SEATS	5
BERTHS	6
SEATS AT THE TABLE	5



PACK

200 SERIES OVERCAB PACK

- White bumper
- Seat covers
- TV arm

200 SERIES OVERCAB PACK FORD

- 155 HP HEAVY DUTY
- White bumper
- Seat covers
- TV arm

EXPO PACK

- Solar panel
- Rear-view camera
- Pleated blind

TRAVEL FIAT PACK

200 SERIES PACK required

- 16" alloy wheel rims
- Skid plate, grille, black headlamp surround
- Traction+
- Fog lights

TRAVEL CITROËN PACK

200 SERIES PACK required

- 16" alloy wheel rims Traction+
- Fog lights

PACK MATIC FIAT - TRAVEL FIAT PACK AND 200 SERIES PACK required

- Automatic transmission
- 7" touch screen radio Android Auto / Apple Car Play

PACK MATIC FORD - 200 SERIES PACK FORD required

- Automatic transmission
- 9" touch screen radio Android Auto / Apple Car Play

EXTRA WARM PACK

- Step insulation
- Winter Pack
- Floor heating
- COMBI 6 E heater (CP Plus - OPT required)

SERIES 200 DIGITAL/SATELLITE TV PACK


TV arm required - OPT on Glamys and Mc4

- 24" TV
- Digital/Satellite aerial

* Window in the bathroom without blind and mosquito net

S= standard O=optional VTR= Fibreglas MTS= multi-layered plywood
The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

Chassis		
Engine, Power	2,2 MJ 140 HP	2,2 140 HP
Maximum technically permissible weight (kg)	3500	3500
Weight unladen in running conditions Min / Max (kg)	2958 / 3072	2958 / 3072
Pay Load Min / Max (kg)	542 / 428	542 / 428
Wheelbase (mm)	4035	4035
Maximum towable weight (kg)	2000	2000
Wheels dimensions	15"	15"
Manual air conditioning	S	S
Driver and Passenger airbag	S	S
Cruise Control with speed limiter	S	S
ABS/ ESC	S/S	S/S
Driver and passenger swivelling seats	S	S
Dimensions and places		
External length (mm) / External width (mm)	7410 / 2350	
External height(cm) / Internal height (cm)	320 / 208	
Auxiliary bed in dinette	S	
Rear Bed (cm)	217x88 - 212x87- (212x147)	
Dimensions Auxiliary bed in Dinette (cm)	216x107(58)	
Overcab bed (cm)	209x160	
Locker (useful opening, cm)	120x80(66)	
Max. internal garage height (cm)	143	
Floor / walls / roof thickness (cm)	5,4 / 3 / 3	
Floor / walls / roof material	MTS / VTR / VTR	
Fiberglass roof, hail-proof	S	
Installations		
Burners	2	
Tank capacity : clear water / wastewater (l)	20(118) / 135	
Automatic trivalent fridge (220V, 12V, gas) (l)	135	
Standard heating system	Combi Gas 4 kW	
Space for 2 gas bottles (tot. Max 15 kg)	S	
Bathroom window (double opaque glass)	S	
Integrated entry step	S	
Heated garage locker	S	
Skylight		
Rear skylight (mm)	S (400x400) / O (700x500)	
Central skylight (mm)	S (400x400)	
Dinette skylight (mm)	S (400x400) / O (700x500)	
Double-glazed windows with blind / mosquito net *	S	
Equipments		
Thermal blind	S	
Beds with staves	S	
Internal LED lightening	S	
Exteriors		
Flyscreen for entrance door	S	
XL Entrance door	S	
External LED light	S	

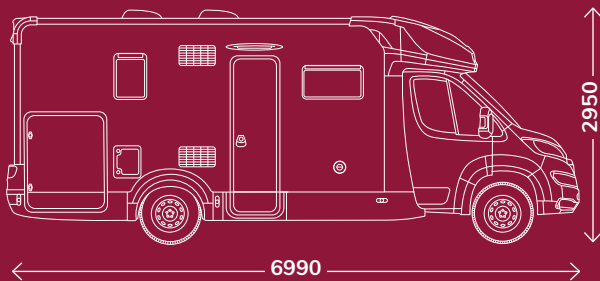

SERIES 200 MC4 221



HOMOLOGATED SEATS	4
BERTHS	4
SEATS AT THE TABLE	6



PACK

200 SERIES LOW-PROFILE MODEL PACK

- White bumpers
- Panoramic roof
- Seat covers
- TV arm

200 SERIES LOW-PROFILE MODEL PACK FORD

- 170 HP
- White bumpers
- Panoramic roof
- Seat covers
- TV arm

EXPO PACK

- Solar panel
- Rear-view camera
- Pleated blind

TRAVEL FIAT PACK

200 SERIES PACK required

- 16" alloy wheel rims
- Skid plate, grille, black headlamp surround
- Traction+
- Fog lights

TRAVEL CITROËN PACK

200 SERIES PACK required

- 16" alloy wheel rims
- Traction+
- Fog lights

PACK MATIC FIAT

TRAVEL FIAT PACK AND 200 SERIES PACK required

- Automatic transmission
- 7" touch screen radio Android Auto / Apple Car Play

PACK MATIC FORD - 200 SERIES PACK FORD required

- Automatic transmission
- 9" touch screen radio Android Auto / Apple Car Play

EXTRA WARM PACK

- Step insulation
- Winter Pack
- Floor heating
- COMBI 6 E heater (CP Plus - OPT required)

SERIES 200 DIGITAL/SATELLITE TV PACK




TV arm required - OPT on Glamys and Mc4


- 24" TV
- Digital/Satellite aerial

* Window in the bathroom without blind and mosquito net

S= standard O=optional VTR= Fibreglas MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

Chassis			
Engine, Power	2,2 MJ 140 HP	2,2 140 HP	2,0 TDI 130 HP
Maximum technically permissible weight (kg)	3500	3500	3500
Weight unladen in running conditions Min / Max (kg)	2908 / 3162	2908 / 3162	2945 / 3162
Pay Load Min / Max (kg)	592 / 338	592 / 338	555 / 338
Wheelbase (mm)	4035	4035	3954
Maximum towable weight (kg)	2000	2000	2000
Wheels dimensions	15"	15"	16"
Manual air conditioning	S	S	S
Driver and Passenger airbag	S	S	S
Cruise Control with speed limiter	S	S	S
ABS / ESC	S/S	S/S	S/S
Driver and passenger swivelling seats	S	S	S
Bluetooth radio / Steering wheel radio controls	O/O	O/O	S/S
Dimensions and places			
External lenght (mm) / External width (mm)	6990 / 2350		
External height(cm) / Internal height (cm)	295 / 208		
Auxiliary bed in dinette	S		
Dimensions Auxiliary bed in Dinette (cm)	216x112		
Elevating Bed (cm)	190x153x128		
Locker (useful opening, cm)	115x95 / 145x58		
Max. internal garage height (cm)	123		
Floor / walls / roof thickness (cm)	5,4 / 3 / 3		
Floor / walls / roof material	MTS / VTR / VTR		
Fiberglass roof, hail-proof	S		
Installations			
Burners	2		
Tank capacity : clear water / wastewater (l)	20(118) / 135		20(118) / 120
Automatic trivalent fridge (220V, 12V, gas) (l)	135		
Standard heating system	Combi Gas 4 kW		
Space for 2 gas bottles (tot. Max 15 kg)	S		
Bathroom window (double opaque glass)	S		
Shower tray with double drain	S		
Integrated entry step	S		
Heated garage locker	S		
Skylight			
Rear skylight (mm)	S (400x400)		
Central skylight (mm)	S (400x400)		
Double-glazed windows with blind / mosquito net *	S		
Equipments			
Thermal blind	S		
Beds with staves	S		
Internal LED lightening	S		
Exteriors			
Flyscreen for entrance door	S		
XL Entrance door	S		
External LED light	S		

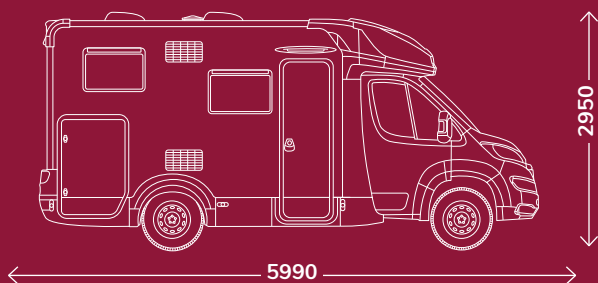

**SERIES 200
MC4 231**



HOMOLOGATED SEATS	4
BERTHS	3
NUMBER OF BERTHS WITH ELEVATING BED (OPT)	4
SEATS AT THE TABLE	4



PACK

200 SERIES LOW-PROFILE MODEL PACK

- White bumpers
- Panoramic roof
- Seat covers
- TV arm

200 SERIES LOW-PROFILE MODEL PACK FORD

- 170 HP
- White bumpers
- Panoramic roof
- Seat covers
- TV arm

EXPO PACK

- Solar panel
- Rear-view camera
- Pleated blind

TRAVEL FIAT PACK

200 SERIES PACK required

- 16" alloy wheel rims
- Skid plate, grille, black headlamp surround
- Traction+
- Fog lights

TRAVEL CITROËN PACK

200 SERIES PACK required

- 16" alloy wheel rims
- Traction+
- Fog lights

PACK MATIC FIAT

TRAVEL FIAT PACK AND 200 SERIES PACK required

- Automatic transmission
- 7" touch screen radio Android Auto / Apple Car Play

PACK MATIC FORD - 200 SERIES PACK FORD required

- Automatic transmission
- 9" touch screen radio Android Auto / Apple Car Play




EXTRA WARM PACK

- Step insulation
- Winter Pack
- Floor heating
- COMBI 6 E heater (CP Plus - OPT required)

SERIES 200 DIGITAL/SATELLITE TV PACK

TV arm required - OPT on Glamys and Mc4

- 24" TV
- Digital/Satellite aerial


Chassis			
Engine, Power	2,2 MJ 140 HP	2,2 140 HP	2,0 TDI 130 HP
Maximum technically permissible weight (kg)	3500	3500	3500
Weight unladen in running conditions Min / Max (kg)	2758 / 2898	2758/2898	2815 / 3172
Pay Load Min / Max (kg)	742 / 602	742 / 602	685 / 328
Wheelbase (mm)	3450	3450	3300
Maximum towable weight (kg)	2000	2000	2000
Wheels dimensions	15"	15"	16"
Manual air conditioning	S	S	S
Driver and Passenger airbag	S	S	S
Cruise Control with speed limiter	S	S	S
ABS / ESC	S/S	S/S	S/S
Driver and passenger swivelling seats	S	S	S
Bluetooth radio / Steering wheel radio controls	O/O	O/O	S/S
Dimensions and places			
External lenght (mm) / External width (mm)	5990 / 2350		
External height(cm) / Internal height (cm)	295 / 208		
Auxiliary bed in dinette	S		
Rear Bed (cm)	216x130 (125)		
Dimensions Auxiliary bed in Dinette (cm)	208x110(78)		
Elevating Bed (cm)	190x81 (O)		
Locker (useful opening, cm)	115x80 - 90x45		
Max. internal garage height (cm)	121		
Floor / walls / roof thickness (cm)	5,4 / 3 / 3		
Floor / walls / roof material	MTS / VTR / VTR		
Fiberglass roof, hail-proof	S		
Installations			
Burners	2		
Tank capacity : clear water / wastewater (l)	20(115) / 100	20(115) / 90	
Automatic trivalent fridge (220V, 12V, gas) (l)	135		
Standard heating system	Combi Gas 4 kW		
Space for 2 gas bottles (tot. Max 15 kg)	S		
Bathroom window (double opaque glass)	S		
Integrated entry step	S		
Heated garage locker	S		
Skylight			
Rear skylight (mm)	S (400x400) / O (700x500)		
Central skylight (mm)	S (400x400)		
Dinette skylight (mm) *	S (700x500)		
Double-glazed windows with blind / mosquito net **	S		
Equipments			
Thermal blind	S		
Beds with staves	S		
Internal LED lightening	S		
Exteriors			
Flyscreen for entrance door	S		
XL Entrance door	S		
External LED light	S		

* By choosing the elevating bed option, the dinette skylight 700x500 mm (Midi Heki) will not be available.

** Window in the bathroom without blind and mosquito net

S= standard O=optional VTR= Fiberglass MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max. 15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

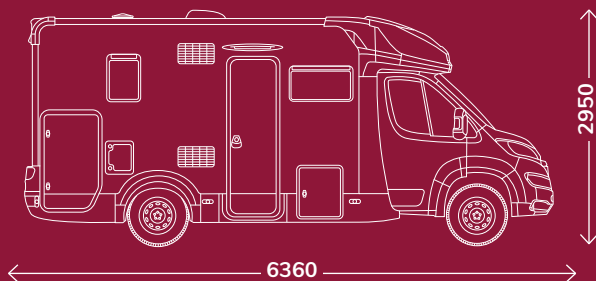

SERIES 200
MC4 237



HOMOLOGATED SEATS	4
BERTHS	4
SEATS AT THE TABLE	6



PACK

200 SERIES LOW-PROFILE MODEL PACK

- White bumpers
- Panoramic roof
- Seat covers
- TV arm

200 SERIES LOW-PROFILE MODEL PACK FORD

- 170 HP
- White bumpers
- Panoramic roof
- Seat covers
- TV arm

EXPO PACK

- Solar panel
- Rear-view camera
- Pleated blind

TRAVEL FIAT PACK

200 SERIES PACK required

- 16" alloy wheel rims
- Skid plate, grille, black headlamp surround
- Traction+
- Fog lights

TRAVEL CITROËN PACK

200 SERIES PACK required

- 16" alloy wheel rims
- Traction+
- Fog lights

PACK MATIC FIAT

TRAVEL FIAT PACK AND 200 SERIES PACK required

- Automatic transmission
- 7" touch screen radio Android Auto / Apple Car Play

PACK MATIC FORD - 200 SERIES PACK FORD required

- Automatic transmission
- 9" touch screen radio Android Auto / Apple Car Play

EXTRA WARM PACK

- Step insulation
- Winter Pack
- Floor heating
- COMBI 6 E heater (CP Plus - OPT required)

SERIES 200 DIGITAL/SATELLITE TV PACK


TV arm required - OPT on Glamys and Mc4

- 24" TV
- Digital/Satellite aerial

Chassis		
Engine, Power	2,2 MJ 140 HP	2,2 140 HP
Maximum technically permissible weight (kg)	3500	3500
Weight unladen in running conditions Min / Max (kg)	2858 / 3168	2858 / 3168
Pay Load Min / Max (kg)	642 / 332	642 / 332
Wheelbase (mm)	3800	3800
Maximum towable weight (kg)	2000	2000
Wheels dimensions	15"	15"
Manual air conditioning	S	S
Driver and Passenger airbag	S	S
Cruise Control with speed limiter	S	S
ABS / ESC	S/S	S/S
Driver and passenger swivelling seats	S	S
Dimensions and places		
External length (mm) / External width (mm)	6360 / 2350	
External height(cm) / Internal height (cm)	295 / 208	
Auxiliary bed in dinette	S	
Dimensions Auxiliary bed in Dinette (cm)	216x160	
Elevating Bed (cm)	190x133	
Locker (useful opening, cm)	115x65 - 145x58	
Max. internal garage height (cm)	123	
Floor / walls / roof thickness (cm)	5,4 / 3 / 3	
Floor / walls / roof material	MTS / VTR / VTR	
Fiberglass roof, hail-proof	S	
Installations		
Burners	2	
Tank capacity: clear water / wastewater (l)	20(120) / 100	
Automatic trivalent fridge (220V, 12V, gas) (l)	135	
Standard heating system	Combi Gas 4 kW	
Space for 2 gas bottles (tot. Max 15 kg)	S	
Bathroom window (double opaque glass)	S	
Integrated entry step	S	
Heated garage locker	S	
Skylight		
Central skylight (mm)	S (400x400)	
Double-glazed windows with blind / mosquito net *	S	
Equipments		
Thermal blind	S	
Beds with staves	S	
Internal LED lightening	S	
Exteriors		
Flyscreen for entrance door	S	
XL Entrance door	S	
External LED light	S	

* Window in the bathroom without blind and mosquito net

S= standard O=optional VTR= Fiberglass MTS= multi-layered plywood
The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

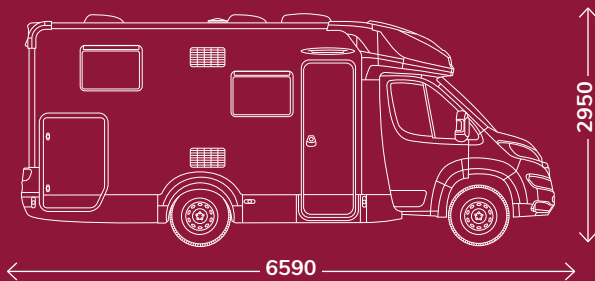

SERIES 200 MC4 239



HOMOLOGATED SEATS	4
BERTHS	3
NUMBER OF BERTHS WITH ELEVATING BED (OPT)	4
SEATS AT THE TABLE	4



PACK

200 SERIES LOW-PROFILE MODEL PACK

- White bumpers
- Panoramic roof
- Seat covers
- TV arm

200 SERIES LOW-PROFILE MODEL PACK FORD

- 170 HP
- White bumpers
- Panoramic roof
- Seat covers
- TV arm

EXPO PACK

- Solar panel
- Rear-view camera
- Pleated blind

TRAVEL FIAT PACK

200 SERIES PACK required

- 16" alloy wheel rims
- Skid plate, grille, black headlamp surround
- Traction+
- Fog lights

TRAVEL CITROËN PACK

200 SERIES PACK required

- 16" alloy wheel rims
- Traction+
- Fog lights

PACK MATIC FIAT

TRAVEL FIAT PACK AND 200 SERIES PACK required

- Automatic transmission
- 7" touch screen radio Android Auto / Apple Car Play

PACK MATIC FORD - 200 SERIES PACK FORD required

- Automatic transmission
- 9" touch screen radio Android Auto / Apple Car Play

EXTRA WARM PACK

- Step insulation
- Winter Pack
- Floor heating
- COMBI 6 E heater (CP Plus - OPT required)

SERIES 200 DIGITAL/SATELLITE TV PACK

- 24" TV
- Digital/Satellite aerial


* By choosing the elevating bed option, the dinette skylight 700x500 mm (Midi Heki) will not be available.

** Window in the bathroom without blind and mosquito net

S= standard O=optional VTR= Fiberglass MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

Chassis		
Engine, Power	2,2 MJ 140 HP	2,2 140 HP
Maximum technically permissible weight (kg)	3500	3500
Weight unladen in running conditions Min / Max (kg)	2838 / 3166	2838 / 3166
Pay Load Min / Max (kg)	662 / 334	662 / 334
Wheelbase (mm)	3450	3450
Maximum towable weight (kg)	2000	2000
Wheels dimensions	15"	15"
Manual air conditioning	S	S
Driver and Passenger airbag	S	S
Cruise Control with speed limiter	S	S
ABS / ESC	S/S	S/S
Driver and passenger swivelling seats	S	S
Dimensions and places		
External length (mm) / External width (mm)	6590 / 2350	
External height(cm) / Internal height (cm)	295 / 208	
Auxiliary bed in dinette	S	
Rear Bed (cm)	191x80 - 186x80-182x212	
Dimensions Auxiliary bed in Dinette (cm)	208x110(78)	
Elevating Bed (cm)	190x81 (O)	
Additional seat rear bed	S	
Locker (useful opening, cm)	115x80(66)	
Max. internal garage height (cm)	121	
Floor / walls / roof thickness (cm)	5,4 / 3 / 3	
Floor / walls / roof material	MTS / VTR / VTR	
Fiberglass roof, hail-proof	S	
Installations		
Burners	2	
Tank capacity : clear water / wastewater (l)	20(118) / 100	
Automatic trivalent fridge (220V, 12V, gas) (l)	135	
Standard heating system	Combi Gas 4 kW	
Space for 2 gas bottles (tot. Max 15 kg)	S	
Bathroom window (double opaque glass)	S	
Shower tray with double drain	S	
Integrated entry step	S	
Heated garage locker	S	
Skylight		
Rear skylight (mm)	S (400x400) / O (700x500)	
Central skylight (mm)	S (400x400)	
Dinette skylight (mm) *	S (700x500)	
Double-glazed windows with blind / mosquito net **	S	
Equipments		
Thermal blind	S	
Beds with staves	S	
Internal LED lightening	S	
Exteriors		
Flyscreen for entrance door	S	
XL Entrance door	S	
External LED light	S	

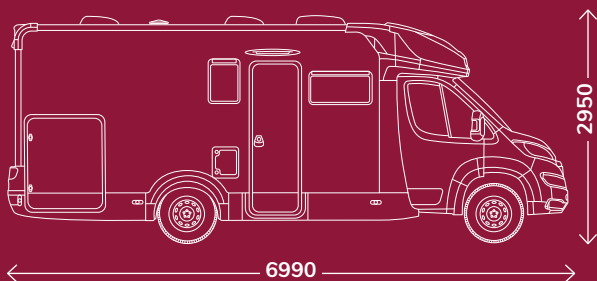

SERIES 200 MC4 260



HOMOLOGATED SEATS	5
BERTHS	3
NUMBER OF BERTHS WITH ELEVATING BED (OPT)	5
SEATS AT THE TABLE	5



PACK

200 SERIES LOW-PROFILE MODEL PACK

- White bumpers
- Panoramic roof
- Seat covers
- TV arm

200 SERIES LOW-PROFILE MODEL PACK FORD

- 170 HP
- White bumpers
- Panoramic roof
- Seat covers
- TV arm

EXPO PACK

- Solar panel
- Rear-view camera
- Pleated blind

TRAVEL FIAT PACK

200 SERIES PACK required

- 16" alloy wheel rims
- Skid plate, grille, black headlamp surround
- Traction+
- Fog lights

TRAVEL CITROËN PACK

200 SERIES PACK required

- 16" alloy wheel rims
- Traction+
- Fog lights

PACK MATIC FIAT

TRAVEL FIAT PACK AND 200 SERIES PACK required

- Automatic transmission
- 7" touch screen radio Android Auto / Apple Car Play

PACK MATIC FORD - 200 SERIES PACK FORD required

- Automatic transmission
- 9" touch screen radio Android Auto / Apple Car Play

EXTRA WARM PACK

- Step insulation
- Winter Pack
- Floor heating
- COMBI 6 E heater (CP Plus - OPT required)

SERIES 200 DIGITAL/SATELLITE TV PACK

TV arm required - OPT on Glamys and Mc4




- 24" TV
- Digital/Satellite aerial


* By choosing the elevating bed option, the dinette skylight 700x500 mm (Midi Heki) will not be available.

** Window in the bathroom without blind and mosquito net

S= standard O=optional VTR= Fibreglas MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

Chassis			
Engine, Power	2,2 MJ 140 HP	2,2 140 HP	2.0 TDI 130 HP
Maximum technically permissible weight (kg)	3500	3500	3500
Weight unladen in running conditions Min / Max (kg)	2888 / 3077	2888 / 3077	2925 / 3077
Pay Load Min / Max (kg)	612 / 417	612 / 417	575 / 423
Wheelbase (mm)	3800	3800	3750
Maximum towable weight (kg)	2000	2000	2000
Wheels dimensions	15"	15"	16"
Manual air conditioning	S	S	S
Driver and Passenger airbag	S	S	S
Cruise Control with speed limiter	S	S	S
ABS/ ESC	S/S	S/S	S/S
Driver and passenger swivelling seats	S	S	S
Bluetooth radio / Steering wheel radio controls	O/O	O/O	S/S
Dimensions and places			
External lenght (mm) / External width (mm)	6990 / 2350		
External height(cm) / Internal height (cm)	295 / 208		
Auxiliary bed in dinette	S		
Rear Bed (cm)	200x126		
Rear bed height adjustment	S		
Dimensions Auxiliary bed in Dinette (cm)	216x106(89)		
Elevating Bed (cm)	190x123(103) (O)		
Locker (useful opening, cm)	115x95		
Max. internal garage height (cm)	122		
Floor / walls / roof thickness (cm)	5,4 / 3 / 3		
Floor / walls / roof material	MTS / VTR / VTR		
Fiberglass roof, hail-proof	S		
Installations			
Burners	2		
Tank capacity : clear water / wastewater (l)	20(115) / 100		20(115) / 120
Automatic trivalent fridge (220V, 12V, gas) (l)	135		
Standard heating system	Combi Gas 4 kW		
Space for 2 gas bottles (tot. Max 15 Kg)	S		
Bathroom window (double opaque glass)	S		
Shower tray with double drain	S		
Integrated entry step	S		
Heated garage locker	S		
Skylight			
Rear skylight (mm)	S (400x400) / O (700x500)		
Central skylight (mm)	S (400x400)		
Dinette skylight (mm)*	S (700x500)		
Double-glazed windows with blind / mosquito net **	S		
Equipments			
Thermal blind	S		
Beds with staves	S		
Internal LED lightening	S		
Exteriors			
Flyscreen for entrance door	S		
XL Entrance door	S		
External LED light	S		

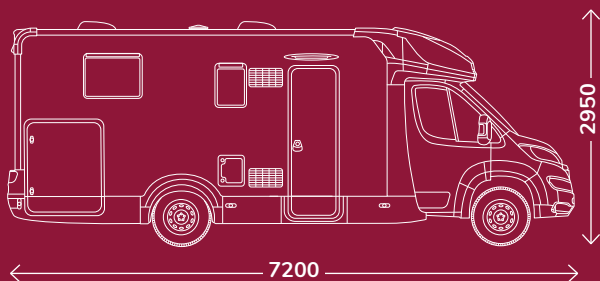

SERIES 200
MC4 262



HOMOLOGATED SEATS	4
BERTHS	4
SEATS AT THE TABLE	4



PACK

200 SERIES LOW-PROFILE MODEL PACK

- White bumpers
- Panoramic roof
- Seat covers
- TV arm

200 SERIES LOW-PROFILE MODEL PACK FORD

- 170 HP
- White bumpers
- Panoramic roof
- Seat covers
- TV arm

EXPO PACK

- Solar panel
- Rear-view camera
- Pleated blind

TRAVEL FIAT PACK

200 SERIES PACK required

- 16" alloy wheel rims
- Skid plate, grille, black headlamp surround
- Traction+
- Fog lights

TRAVEL CITROËN PACK

200 SERIES PACK required

- 16" alloy wheel rims
- Traction+
- Fog lights

PACK MATIC FIAT

TRAVEL FIAT PACK AND 200 SERIES PACK required

- Automatic transmission
- 7" touch screen radio Android Auto / Apple Car Play

PACK MATIC FORD - 200 SERIES PACK FORD required

- Automatic transmission
- 9" touch screen radio Android Auto / Apple Car Play

EXTRA WARM PACK

- Step insulation
- Winter Pack
- Floor heating
- COMBI 6 E heater (CP Plus - OPT required)

SERIES 200 DIGITAL/SATELLITE TV PACK

TV arm required - OPT on Glamys and Mc4


- 24" TV
- Digital/Satellite aerial

Chassis		
Engine, Power	2,2 MJ 140 HP	2,2 140 HP
Maximum technically permissible weight (kg)	3500	3500
Weight unladen in running conditions Min / Max (kg)	3018 / 3158	3018 / 3158
Pay Load Min / Max (kg)	482 / 342	482 / 342
Wheelbase (mm)	4035	4035
Maximum towable weight (kg)	2000	2000
Wheels dimensions	15"	15"
Manual air conditioning	S	S
Driver and Passenger airbag	S	S
Cruise Control with speed limiter	S	S
ABS / ESC	S/S	S/S
Driver and passenger swivelling seats	S	S
Dimensions and places		
External length (mm) / External width (mm)	7200 / 2350	
External height(cm) / Internal height (cm)	295 / 208	
Auxiliary bed in dinette	O	
Rear Bed (cm)	190x150	
Rear bed height adjustment	S	
Dimensions Auxiliary bed in Dinette (cm)	216x103(66) (O)	
Elevating Bed (cm)	190x123(103)	
Locker (useful opening, cm)	115x95	
Max. internal garage height (cm)	117	
Floor / walls / roof thickness (cm)	5,4 / 3 / 3	
Floor / walls / roof material	MTS / VTR / VTR	
Fiberglass roof, hail-proof	S	
Installations		
Burners	2	
Tank capacity : clear water / wastewater (l)	20(120) / 135	
Automatic trivalent fridge (220V, 12V, gas) (l)	135	
Standard heating system	Combi Gas 4 kW	
Space for 2 gas bottles (tot. Max 15 kg)	S	
Bathroom window (double opaque glass)	S	
Integrated entry step	S	
Heated garage locker	S	
Skylight		
Rear skylight (mm)	S (400x400) / O (700x500)	
Central skylight (mm)	S (400x400)	
Double-glazed windows with blind / mosquito net *	S	
Equipments		
Thermal blind	S	
Beds with staves	S	
Internal LED lightening	S	
Exteriors		
Flyscreen for entrance door	S	
XL Entrance door	S	
External LED light	S	

* Window in the bathroom without blind and mosquito net

S= standard O=optional VTR= Fibreglas MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

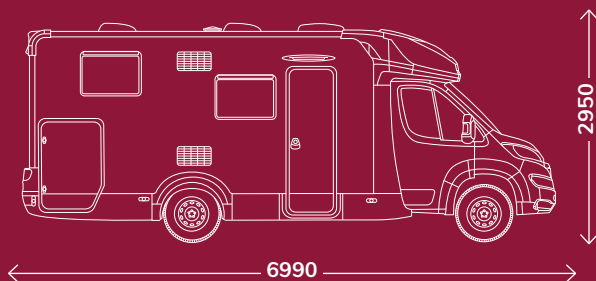

SERIES 200 MC4 265



HOMOLOGATED SEATS	5
BERTHS	3
NUMBER OF BERTHS WITH ELEVATING BED (OPT)	5
SEATS AT THE TABLE	5



PACK

200 SERIES LOW-PROFILE MODEL PACK

- White bumpers
- Panoramic roof
- Seat covers
- TV arm

200 SERIES LOW-PROFILE MODEL PACK FORD

- 170 HP
- White bumpers
- Panoramic roof
- Seat covers
- TV arm

EXPO PACK

- Solar panel
- Rear-view camera
- Pleated blind

TRAVEL FIAT PACK

200 SERIES PACK required

- 16" alloy wheel rims
- Skid plate, grille, black headlamp surround
- Traction+
- Fog lights

TRAVEL CITROËN PACK

200 SERIES PACK required

- 16" alloy wheel rims
- Traction+
- Fog lights

PACK MATIC FIAT

TRAVEL FIAT PACK AND 200 SERIES PACK required

- Automatic transmission
- 7" touch screen radio Android Auto / Apple Car Play

PACK MATIC FORD - 200 SERIES PACK FORD required

- Automatic transmission
- 9" touch screen radio Android Auto / Apple Car Play

EXTRA WARM PACK

- Step insulation
- Winter Pack
- Floor heating
- COMBI 6 E heater (CP Plus - OPT required)

SERIES 200 DIGITAL/SATELLITE TV PACK TV arm required - OPT on Glamys and Mc4

- 24" TV
- Digital/Satellite aerial


Chassis		
Engine, Power	2,2 MJ 140 HP	2,2 140 HP
Maximum technically permissible weight (kg)	3500	3500
Weight unladen in running conditions Min / Max (kg)	2898 / 3077	2898 / 3077
Pay Load Min / Max (kg)	602 / 423	602 / 423
Wheelbase (mm)	3800	3800
Maximum towable weight (kg)	2000	2000
Wheels dimensions	15"	15"
Manual air conditioning	S	S
Driver and Passenger airbag	S	S
Cruise Control with speed limiter	S	S
ABS / ESC	S/S	S/S
Driver and passenger swivelling seats	S	S
Dimensions and places		
External length (mm) / External width (mm)	6990 / 2350	
External height(cm) / Internal height (cm)	295 / 208	
Auxiliary bed in dinette	S	
Rear Bed (cm)	185x80 - 195x80 -182x215	
Dimensions Auxiliary bed in Dinette (cm)	216x120(43)	
Elevating Bed (cm)	190x130(93) (O)	
Additional seat rear bed	S	
Locker (useful opening, cm)	115x80	
Max. internal garage height (cm)	121	
Floor / walls / roof thickness (cm)	5,4 / 3 / 3	
Floor / walls / roof material	MTS / VTR / VTR	
Fiberglass roof, hail-proof	S	
Installations		
Burners	2	
Tank capacity : clear water / wastewater (l)	20(115) / 100	
Automatic trivalent fridge (220V, 12V, gas) (l)	135	
Standard heating system	Combi Gas 4 kW	
Space for 2 gas bottles (tot. Max 15 kg)	S	
Bathroom window (double opaque glass)	S	
Integrated entry step	S	
Heated garage locker	S	
Skylight		
Rear skylight (mm)	S (400x400) / O (700x500)	
Central skylight (mm)	S (400x400)	
Dinette skylight (mm) *	S (700x500)	
Double-glazed windows with blind / mosquito net **	S	
Equipments		
Thermal blind	S	
Beds with staves	S	
Internal LED lightening	S	
Exteriors		
Flyscreen for entrance door	S	
XL Entrance door	S	
External LED light	S	

* By choosing the elevating bed option, the dinette skylight 700x500 mm (Midi Heki) will not be available.

** Window in the bathroom without blind and mosquito net

S= standard O=optional VTR= Fiberglass MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

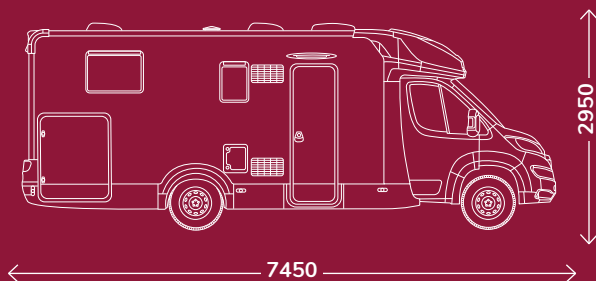

**SERIES 200
MC4 273**



HOMOLOGATED SEATS	5
BERTHS	3
NUMBER OF BERTHS WITH ELEVATING BED (OPT)	5
SEATS AT THE TABLE	5



PACK

200 SERIES LOW-PROFILE MODEL PACK

- White bumpers
- Panoramic roof
- Seat covers
- TV arm

200 SERIES LOW-PROFILE MODEL PACK FORD

- 170 HP
- White bumpers
- Panoramic roof
- Seat covers
- TV arm

EXPO PACK

- Solar panel
- Rear-view camera
- Pleated blind

TRAVEL FIAT PACK

200 SERIES PACK required

- 16" alloy wheel rims
- Skid plate, grille, black headlamp surround
- Traction+
- Fog lights

TRAVEL CITROËN PACK

200 SERIES PACK required

- 16" alloy wheel rims
- Traction+
- Fog lights

PACK MATIC FIAT

TRAVEL FIAT PACK AND 200 SERIES PACK required

- Automatic transmission
- 7" touch screen radio Android Auto / Apple Car Play

PACK MATIC FORD - 200 SERIES PACK FORD required




- Automatic transmission
- 9" touch screen radio Android Auto / Apple Car Play

EXTRA WARM PACK

- Step insulation
- Winter Pack
- Floor heating
- COMBI 6 E heater (CP Plus - OPT required)

SERIES 200 DIGITAL/SATELLITE TV PACK TV arm required - OPT on Glamys and Mc4

- 24" TV
- Digital/Satellite aerial


Chassis			
Engine, Power	2,2 MJ 140 HP	2,2 140 HP	2.0 TDI 130 HP
Maximum technically permissible weight (kg)	3500	3500	3500
Weight unladen in running conditions Min / Max (kg)	2978 / 3072	2978 / 3072	3015 / 3072
Pay Load Min / Max (kg)	522 / 428	522 / 428	485 / 428
Wheelbase (mm)	4035	4035	3954
Maximum towable weight (kg)	2000	2000	2000
Wheels dimensions	15"	15"	16"
Manual air conditioning	S	S	S
Driver and Passenger airbag	S	S	S
Cruise Control with speed limiter	S	S	S
ABS / ESC	S/S	S/S	S/S
Driver and passenger swivelling seats	S	S	S
Bluetooth radio / Steering wheel radio controls	O/O	O/O	S/S
Dimensions and places			
External lenght (mm) / External width (mm)	7450 / 2350		
External height(cm) / Internal height (cm)	295 / 208		
Auxiliary bed in dinette	S		
Rear Bed (cm)	200x80 + 200x80-200x212		
Dimensions Auxiliary bed in Dinette (cm)	216x107(58)		
Elevating Bed (cm)	190x123(103) (O)		
Additional seat rear bed	S		
Locker (useful opening, cm)	115x95		
Max. internal garage height (cm)	121		
Floor / walls / roof thickness (cm)	5,4 / 3 / 3		
Floor / walls / roof material	MTS / VTR / VTR		
Fiberglass roof, hail-proof	S		
Installations			
Burners	2		
Tank capacity : clear water / wastewater (l)	20(118) / 135		20(118) / 120
Automatic trivalent fridge (220V, 12V, gas) (l)	135		
Standard heating system	Combi Gas 4 kW		
Space for 2 gas bottles (tot. Max 15 kg)	S		
Bathroom window (double opaque glass)	S		
Integrated entry step	S		
Heated garage locker	S		
Skylight			
Rear skylight (mm)	S (400x400) / O (700x500)		
Central skylight (mm)	S (400x400)		
Dinette skylight (mm) *	S (700x500)		
Double-glazed windows with blind / mosquito net **	S		
Equipments			
Thermal blind	S		
Beds with staves	S		
Internal LED lightening	S		
Exteriors			
Flyscreen for entrance door	S		
XL Entrance door	S		
External LED light	S		

* By choosing the elevating bed option, the dinette skylight 700x500 mm (Midi Heki) will not be available.

** Window in the bathroom without blind and mosquito net

S= standard O=optional VTR= Fiberglass MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

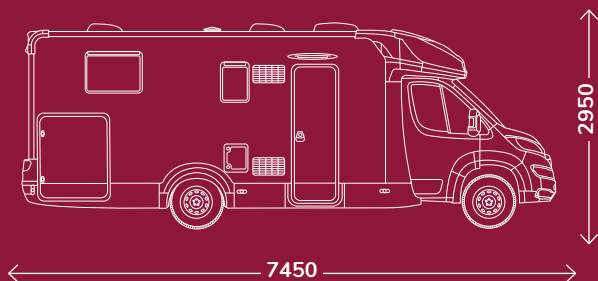

**SERIES 200
MC4 279**



HOMOLOGATED SEATS	5
BERTHS	3
NUMBER OF BERTHS WITH ELEVATING BED (OPT)	5
SEATS AT THE TABLE	5



PACK

200 SERIES LOW-PROFILE MODEL PACK

- White bumpers
- Panoramic roof
- Seat covers
- TV arm

200 SERIES LOW-PROFILE MODEL PACK FORD

- 170 HP
- White bumpers
- Panoramic roof
- Seat covers
- TV arm

EXPO PACK

- Solar panel
- Rear-view camera
- Pleated blind

TRAVEL FIAT PACK

200 SERIES PACK required

- 16" alloy wheel rims
- Skid plate, grille, black headlamp surround
- Traction+
- Fog lights

TRAVEL CITROËN PACK

200 SERIES PACK required

- 16" alloy wheel rims
- Traction+
- Fog lights

PACK MATIC FIAT

TRAVEL FIAT PACK AND 200 SERIES PACK required

- Automatic transmission
- 7" touch screen radio Android Auto / Apple Car Play

PACK MATIC FORD - 200 SERIES PACK FORD required




- Automatic transmission
- 9" touch screen radio Android Auto / Apple Car Play

EXTRA WARM PACK

- Step insulation
- Winter Pack
- Floor heating
- COMBI 6 E heater (CP Plus - OPT required)

SERIES 200 DIGITAL/SATELLITE TV PACK

- 24" TV
- Digital/Satellite aerial


Chassis			
Engine, Power	2,2 MJ 140 HP	2,2 140 HP	2.0 TDI 130 HP
Maximum technically permissible weight (kg)	3500	3500	3500
Weight unladen in running conditions Min / Max (kg)	2978 / 3072	2978 / 3072	3015 / 3072
Pay Load Min / Max (kg)	522 / 428	522 / 428	485 / 428
Wheelbase (mm)	4035	4035	3954
Maximum towable weight (kg)	2000	2000	2000
Wheels dimensions	15"	15"	16"
Manual air conditioning	S	S	S
Driver and Passenger airbag	S	S	S
Cruise Control with speed limiter	S	S	S
ABS / ESC	S/S	S/S	S/S
Driver and passenger swivelling seats	S	S	S
Bluetooth radio / Steering wheel radio controls	O/O	O/O	S/S
Dimensions and places			
External length (mm) / External width (mm)	7450 / 2350		
External height(cm) / Internal height (cm)	295 / 208		
Auxiliary bed in dinette	S		
Rear Bed (cm)	190x150		
Rear bed height adjustment	S		
Dimensions Auxiliary bed in Dinette (cm)	216x107(58)		
Elevating Bed (cm)	190x123(103) (O)		
Locker (useful opening, cm)	115x95		
Max. internal garage height (cm)	125		
Floor / walls / roof thickness (cm)	5,4 / 3 / 3		
Floor / walls / roof material	MTS / VTR / VTR		
Fiberglass roof, hail-proof	S		
Installations			
Burners	2		
Tank capacity : clear water / wastewater (l)	20(118) / 135		20(118) / 120
Automatic trivalent fridge (220V, 12V, gas) (l)	135		
Standard heating system	Combi Gas 4 kW		
Space for 2 gas bottles (tot. Max 15 kg)	S		
Bathroom window (double opaque glass)	S		
Integrated entry step	S		
Heated garage locker	S		
Skylight			
Rear skylight (mm)	S (400x400) / O (700x500)		
Central skylight (mm)	S (400x400)		
Dinette skylight (mm) *	S (700x500)		
Double-glazed windows with blind / mosquito net **	S		
Equipments			
Thermal blind	S		
Beds with staves	S		
Internal LED lightening	S		
Exteriors			
Flyscreen for entrance door	S		
XL Entrance door	S		
External LED light	S		

* By choosing the elevating bed option, the dinette skylight 700x500 mm (Midi Heki) will not be available.

** Window in the bathroom without blind and mosquito net

S= standard O=optional VTR= Fiberglass MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

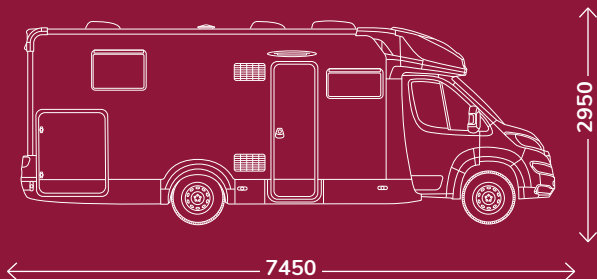

SERIES 200
MC4 281



HOMOLOGATED SEATS	4
BERTHS	3
NUMBER OF BERTHS WITH ELEVATING BED (OPT)	4
SEATS AT THE TABLE	4



PACK

200 SERIES LOW-PROFILE MODEL PACK

- White bumpers
- Panoramic roof
- Seat covers
- TV arm

200 SERIES LOW-PROFILE MODEL PACK FORD

- 170 HP
- White bumpers
- Panoramic roof
- Seat covers
- TV arm

EXPO PACK

- Solar panel
- Rear-view camera
- Pleated blind

TRAVEL FIAT PACK

200 SERIES PACK required

- 16" alloy wheel rims
- Skid plate, grille, black headlamp surround
- Traction+
- Fog lights

TRAVEL CITROËN PACK

200 SERIES PACK required

- 16" alloy wheel rims
- Traction+
- Fog lights

PACK MATIC FIAT

TRAVEL FIAT PACK AND 200 SERIES PACK required

- Automatic transmission
- 7" touch screen radio Android Auto / Apple Car Play

PACK MATIC FORD - 200 SERIES PACK FORD required

- Automatic transmission
- 9" touch screen radio Android Auto / Apple Car Play

EXTRA WARM PACK

- Step insulation
- Winter Pack
- Floor heating
- COMBI 6 E heater (CP Plus - OPT required)

SERIES 200 DIGITAL/SATELLITE TV PACK




- 24" TV
- Digital/Satellite aerial


* By choosing the elevating bed option, the dinette skylight 700x500 mm (Midi Heki) will not be available.

** Window in the bathroom without blind and mosquito net

S= standard O=optional VTR= Fibreglas MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

Chassis			
Engine, Power	2,2 MJ 140 HP	2,2 140 HP	2.0 TDI 130 HP
Maximum technically permissible weight (kg)	3500	3500	3500
Weight unladen in running conditions Min / Max (kg)	2988 / 3157	2988 / 3157	3025 / 3157
Pay Load Min / Max (kg)	512 / 343	512 / 343	475 / 343
Wheelbase (mm)	4035	4035	3954
Maximum towable weight (kg)	2000	2000	2000
Wheels dimensions	15"	15"	16"
Manual air conditioning	S	S	S
Driver and Passenger airbag	S	S	S
Cruise Control with speed limiter	S	S	S
ABS/ ESC	S/S	S/S	S/S
Driver and passenger swivelling seats	S	S	S
Bluetooth radio / Steering wheel radio controls	O/O	O/O	S/S
Dimensions and places			
External lenght (mm) / External width (mm)	7450 / 2350		
External height(cm) / Internal height (cm)	295 / 208		
Auxiliary bed in dinette	S		
Rear Bed (cm)	190x150		
Rear bed height adjustment	S		
Dimensions Auxiliary bed in Dinette (cm)	216x103(83)		
Elevating Bed (cm)	190x123(103) (O)		
Locker (useful opening, cm)	115x95		
Max. internal garage height (cm)	125		
Floor / walls / roof thickness (cm)	5,4 / 3 / 3		
Floor / walls / roof material	MTS / VTR / VTR		
Fiberglass roof, hail-proof	S		
Installations			
Burners	2		
Tank capacity : clear water / wastewater (l)	20(118) / 135		20(118) / 120
Automatic trivalent fridge (220V, 12V, gas) (l)	135		
Standard heating system	Combi Gas 4 kW		
Space for 2 gas bottles (tot. Max 15 kg)	S		
Bathroom window (double opaque glass)	S		
Integrated entry step	S		
Heated garage locker	S		
Skylight			
Rear skylight (mm)	S (400x400) / O (700x500)		
Central skylight (mm)	S (400x400)		
Dinette skylight (mm) *	S (700x500)		
Double-glazed windows with blind / mosquito net **	S		
Equipments			
Thermal blind	S		
Beds with staves	S		
Internal LED lightening	S		
Exteriors			
Flyscreen for entrance door	S		
XL Entrance door	S		
External LED light	S		

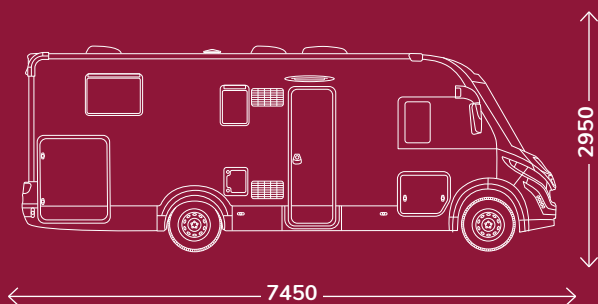

SERIES 200 NEVIS 273



HOMOLOGATED SEATS	5
BERTHS	5
SEATS AT THE TABLE	5



PACK

EXPO NEVIS PACK

- Solar panel
- Rear view camera
- 16" alloy wheel rims
- Traction+

EXPO NEVIS 180 HP PACK

- 180 HP engine
- Solar panel
- Rear view camera
- 16" alloy wheel rims
- Traction+

PACK MATIC FIAT - EXPO NEVIS PACK required

- Automatic transmission
- 7" touch screen radio Android Auto / Apple Car Play

EXTRA WARM PACK

- Step insulation
- Winter Pack
- Floor heating
- COMBI 6 E heater (CP Plus - OPT required)

SERIES 200 DIGITAL/SATELLITE TV PACK


- 24" TV
- Digital/Satellite aerial

Chassis	
Engine, Power	2,2 MJ 140 HP
Maximum technically permissible weight (kg)	3500
Weight unladen in running conditions Min / Max (kg)	2968 / 3072
Pay Load Min / Max (kg)	532 / 428
Wheelbase (mm)	4035
Maximum towable weight (kg)	2000
Wheels dimensions	15"
Manual air conditioning	S
Driver and Passenger airbag	S
Cruise Control with speed limiter	S
ABS / ESC	S/S
Driver and passenger swivelling seats	S
DRL LED (Day running light)	S
Dimensions and places	
External length (mm) / External width (mm)	7450 / 2350
External height (cm) / Internal height (cm)	295 / 208
Auxiliary bed in dinette	S
Rear Bed (cm)	200x80 + 200x80 - 200x212
Dimensions Auxiliary bed in Dinette (cm)	216x110(58)
Elevating Bed (cm)	187x134
Additional seat rear bed	S
Locker (useful opening, cm)	115x95
Max. internal garage height (cm)	121
Floor / walls / roof thickness (cm)	5,4 / 3 / 3
Floor / walls / roof material	MTS / VTR / VTR
Fiberglass roof, hail-proof	S
Installations	
Burners	2
Tank capacity : clear water / wastewater (l)	20(118) / 135
Automatic trivalent fridge (220V, 12V, gas) (l)	135
Standard heating system	Combi Gas 4 kW
Space for 2 gas bottles (tot. Max 15 kg)	S
Bathroom window (double opaque glass)	S
Integrated entry step	S
Heated garage locker	S
Skylight	
Rear skylight (mm)	S (400x400) / O (700x500)
Central skylight (mm)	S (400x400)
Dinette skylight (mm)	S (700x500) / O (960x655)
Double-glazed windows with blind / mosquito net *	S
Equipments	
Pleated cab blind	S
Beds with staves	S
Swivelling LCD holder	S
Internal LED lightening	S
Exteriors	
Flyscreen for entrance door	S
XL Entrance door	S
External LED light	S

* Window in the bathroom without blind and mosquito net

S= standard O=optional VTR= Fibreglas MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

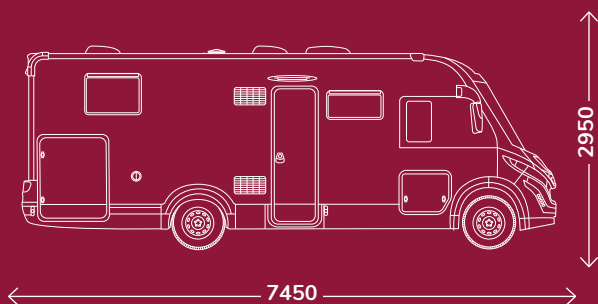

SERIES 200 NEVIS 281



HOMOLOGATED SEATS	4
BERTHS	4
SEATS AT THE TABLE	4



PACK

EXPO NEVIS PACK

- Solar panel
- Rear view camera
- 16" alloy wheel rims
- Traction+

EXPO NEVIS 180 HP PACK

- 180 HP engine
- Solar panel
- Rear view camera
- 16" alloy wheel rims
- Traction+

PACK MATIC FIAT - EXPO NEVIS PACK required

- Automatic transmission
- 7" touch screen radio Android Auto / Apple Car Play

EXTRA WARM PACK

- Step insulation
- Winter Pack
- Floor heating
- COMBI 6 E heater (CP Plus - OPT required)

SERIES 200 DIGITAL/SATELLITE TV PACK


- 24" TV
- Digital/Satellite aerial

Chassis	
Engine, Power	2,2 MJ 140 HP
Maximum technically permissible weight (kg)	3500
Weight unladen in running conditions Min / Max (kg)	2978 / 3157
Pay Load Min / Max (kg)	522 / 343
Wheelbase (mm)	4035
Maximum towable weight (kg)	2000
Wheels dimensions	15"
Manual air conditioning	S
Driver and Passenger airbag	S
Cruise Control with speed limiter	S
ABS / ESC	S/S
Driver and passenger swivelling seats	S
DRL LED (Day running light)	S
Dimensions and places	
External length (mm) / External width (mm)	7450 / 2350
External height (cm) / Internal height (cm)	295 / 208
Auxiliary bed in dinette	O
Rear Bed (cm)	190x150
Rear bed height adjustment	S
Dimensions Auxiliary bed in Dinette (cm)	216x103(83) (O)
Elevating Bed (cm)	187x134
Locker (useful opening, cm)	115x95
Max. internal garage height (cm)	125
Floor / walls / roof thickness (cm)	5,4 / 3 / 3
Floor / walls / roof material	MTS / VTR / VTR
Fiberglass roof, hail-proof	S
Installations	
Burners	2
Tank capacity : clear water / wastewater (l)	20(118) / 135
Automatic trivalent fridge (220V, 12V, gas) (l)	135
Standard heating system	Combi Gas 4 kW
Space for 2 gas bottles (tot. Max 15 kg)	S
Bathroom window (double opaque glass)	S
Integrated entry step	S
Heated garage locker	S
Skylight	
Rear skylight (mm)	S (400x400) / O (700x500)
Central skylight (mm)	S (400x400)
Dinette skylight (mm)	S (700x500) / O (960x655)
Double-glazed windows with blind / mosquito net *	S
Equipments	
Pleated cab blind	S
Beds with staves	S
Swivelling LCD holder	S
Internal LED lightening	S
Exteriors	
Flyscreen for entrance door	S
XL Entrance door	S
External LED light	S

* Window in the bathroom without blind and mosquito net

S= standard O=optional VTR= Fibreglas MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

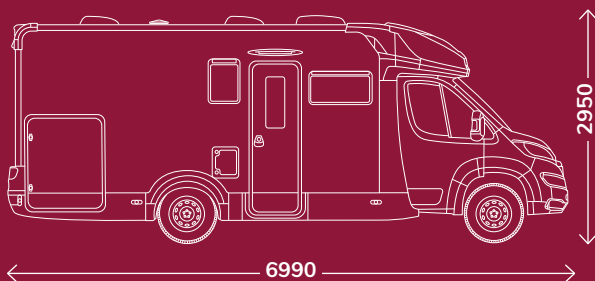

SERIES 800
MC4 860



HOMOLOGATED SEATS	5
BERTHS	3
NUMBER OF BERTHS WITH ELEVATING BED (OPT)	5
SEATS AT THE TABLE	5



PACK

EXPO PACK

- Solar panel
- Rear-view camera
- Pleated blind

TRAVEL FIAT PACK - EXPO PACK required

- 16" alloy wheel rims
- Skid plate, grille, black headlamp surround
- Traction+
- Fog lights

TRAVEL CITROËN PACK - EXPO PACK required

- 16" alloy wheel rims
- Traction+
- Fog lights

PACK MATIC - TRAVEL FIAT PACK AND EXPO PACK required

- Automatic transmission
- 7" touch screen radio Android Auto / Apple Car Play

EXTRA WARM PACK

- Step insulation
- Winter Pack
- Floor film heating
- COMBI 6 E heater

OUTDOOR PACK

- External gas connection
- External multimedia outlet
- Shower in garage
- Guides and fixing rings in garage


SERIES 800 DIGITAL/SATELLITE TV PACK

- 32" TV
- Digital/Satellite aerial

* By choosing the elevating bed option, the dinette skylight 700x500 mm (Midi Heki) will not be available

S= standard O=optional VTR= Fibreglas MTS= multi-layered plywood
The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

Chassis		
Engine, Power	2,2 MJ 140 HP	2,2 140 HP
Maximum technically permissible weight (kg)	3500	3500
Weight unladen in running conditions Min / Max (kg)	2888 / 3077	2888 / 3077
Pay Load Min / Max (kg)	612 / 423	612 / 423
Wheelbase (mm)	3800	3800
Maximum towable weight (kg)	2000	2000
Wheels dimensions	15"	15"
Manual air conditioning	S	S
Driver and Passenger airbag	S	S
Cruise Control with speed limiter	S	S
ABS / ESC	S/S	S/S
Driver and passenger swivelling seats	S	S
Cab seat covers	S	S
Painted front bumper	S	S
Dimensions and places		
External length (mm) / External width (mm)	6990 / 2350	
External height(cm) / Internal height (cm)	295 / 208	
Auxiliary bed in dinette	S	
Rear Bed (cm)	200x126	
Rear bed height adjustment	S	
Dimensions Auxiliary bed in Dinette (cm)	216x106(89)	
Elevating Bed (cm)	190x123(103) (O)	
Locker (useful opening, cm)	115x95	
Max. internal garage height (cm)	122	
Floor / walls / roof thickness (cm)	5,4 / 3 / 3	
Floor / walls / roof material	MTS / VTR / VTR	
Fiberglass roof, hail-proof	S	
Installations		
Burners	3	
Tank capacity : clear water / wastewater (l)	20(115) / 100	
Automatic trivalent fridge (220V, 12V, gas) (l)	135	
Standard heating system	Combi Gas 4 kW	
Space for 2 gas bottles (tot. Max 15 kg)	S	
Bathroom window (double opaque glass)	S	
Shower tray with double drain	S	
Integrated entry step	S	
Heated garage locker	S	
Skylight		
Panoramic roof (mm)	S (1000x800)	
Rear skylight (mm)	S (400x400) / O (960x655)	
Central skylight (mm)	S (400x400)	
Dinette skylight (mm) *	S (700x500)	
Double-glazed windows with blind / mosquito net	S	
Equipments		
Thermal blind	S	
Beds with staves	S	
Swivelling LCD holder	S	
Internal LED lightening	S	
Exteriors		
Entrance door with fixed window	S	
Flyscreen for entrance door	S	
Entrance door with two central locking points	S	
XL Entrance door	S	
External LED light	S	

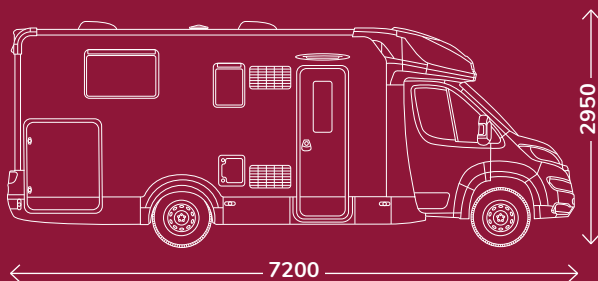

SERIES 800
MC4 862



HOMOLOGATED SEATS	4
BERTHS	4
SEATS AT THE TABLE	4



PACK

EXPO PACK

- Solar panel
- Rear-view camera
- Pleated blind

TRAVEL FIAT PACK - EXPO PACK required

- 16" alloy wheel rims
- Skid plate, grille, black headlamp surround
- Traction+
- Fog lights

TRAVEL CITROËN PACK - EXPO PACK required

- 16" alloy wheel rims
- Traction+
- Fog lights

PACK MATIC - TRAVEL FIAT PACK AND EXPO PACK required

- Automatic transmission
- 7" touch screen radio Android Auto / Apple Car Play

EXTRA WARM PACK

- Step insulation
- Winter Pack
- Floor film heating
- COMBI 6 E heater

OUTDOOR PACK


- External gas connection
- External multimedia outlet
- Shower in garage
- Guides and fixing rings in garage

SERIES 800 DIGITAL/SATELLITE TV PACK

- 32" TV
- Digital/Satellite aerial

Chassis		
Engine, Power	2,2 MJ 140 HP	2,2 140 HP
Maximum technically permissible weight (kg)	3500	3500
Weight unladen in running conditions Min / Max (kg)	3018 / 3158	3018 / 3158
Pay Load Min / Max (kg)	482 / 342	482 / 342
Wheelbase (mm)	4035	4035
Maximum towable weight (kg)	2000	2000
Wheels dimensions	15"	15"
Manual air conditioning	S	S
Driver and Passenger airbag	S	S
Cruise Control with speed limiter	S	S
ABS / ESC	S/S	S/S
Driver and passenger swivelling seats	S	S
Cab seat covers	S	S
Painted front bumper	S	S
Dimensions and places		
External length (mm) / External width (mm)	7200 / 2350	
External height(cm) / Internal height (cm)	295 / 208	
Auxiliary bed in dinette	O	
Rear Bed (cm)	190x150	
Rear bed height adjustment	S	
Dimensions Auxiliary bed in Dinette (cm)	216x116(54) (O)	
Elevating Bed (cm)	190x123(103)	
Locker (useful opening, cm)	115x95	
Max. internal garage height (cm)	117	
Floor / walls / roof thickness (cm)	5,4 / 3 / 3	
Floor / walls / roof material	MTS / VTR / VTR	
Fiberglass roof, hail-proof	S	
Installations		
Burners	3	
Tank capacity : clear water / wastewater (l)	20(120) / 135	
Automatic trivalent fridge (220V, 12V, gas) (l)	145	
Standard heating system	Combi Gas 4 kW	
Space for 2 gas bottles (tot. Max 15 kg)	S	
Bathroom window (double opaque glass)	S	
Integrated entry step	S	
Heated garage locker	S	
Skylight		
Panoramic roof (mm)	S (1000x800)	
Rear skylight (mm)	S (400x400) / O (960x655)	
Central skylight (mm)	S (400x400)	
Double-glazed windows with blind / mosquito net	S	
Equipments		
Thermal blind	S	
Beds with staves	S	
Swivelling LCD holder	S	
Internal LED lightening	S	
Exteriors		
Entrance door with fixed window	S	
Flyscreen for entrance door	S	
Entrance door with two central locking points	S	
XL Entrance door	S	
External LED light	S	

S= standard O=optional VTR= Fiberglass MTS= multi-layered plywood
The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

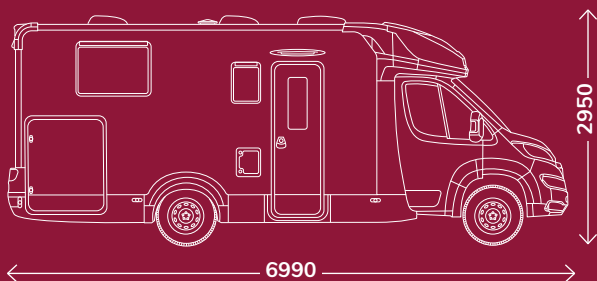

**SERIES 800
MC4 865**



HOMOLOGATED SEATS	5
BERTHS	3
NUMBER OF BERTHS WITH ELEVATING BED (OPT)	5
SEATS AT THE TABLE	5



PACK

EXPO PACK

- Solar panel
- Rear-view camera
- Pleated blind

TRAVEL FIAT PACK - EXPO PACK required

- 16" alloy wheel rims
- Skid plate, grille, black headlamp surround
- Traction+
- Fog lights

TRAVEL CITROËN PACK - EXPO PACK required

- 16" alloy wheel rims
- Traction+
- Fog lights

PACK MATIC - TRAVEL FIAT PACK AND EXPO PACK required

- Automatic transmission
- 7" touch screen radio Android Auto / Apple Car Play

EXTRA WARM PACK

- Step insulation
- Winter Pack
- Floor film heating
- COMBI 6 E heater

OUTDOOR PACK



- External gas connection
- External multimedia outlet
- Shower in garage
- Guides and fixing rings in garage


SERIES 800 DIGITAL/SATELLITE TV PACK

- 32" TV
- Digital/Satellite aerial

* By choosing the elevating bed option, the dinette skylight 700x500 mm (Midi Heki) will not be available

S= standard O=optional VTR= Fibreglas MTS= multi-layered plywood
The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

Chassis		
Engine, Power	2,2 MJ 140 HP	2,2 MJ 140 HP
Maximum technically permissible weight (kg)	3500	3500
Weight unladen in running conditions Min / Max (kg)	2928 / 3073	2928 / 3073
Pay Load Min / Max (kg)	572 / 427	572 / 427
Wheelbase (mm)	3800	3800
Maximum towable weight (kg)	2000	2000
Wheels dimensions	15"	15"
Manual air conditioning	S	S
Driver and Passenger airbag	S	S
Cruise Control with speed limiter	S	S
ABS / ESC	S/S	S/S
Driver and passenger swivelling seats	S	S
Cab seat covers	S	S
Painted front bumper	S	S
Dimensions and places		
External length (mm) / External width (mm)	6990 / 2350	
External height(cm) / Internal height (cm)	295 / 208	
Auxiliary bed in dinette	S	
Rear Bed (cm)	193x80 + 200x80-199x215	
Dimensions Auxiliary bed in Dinette (cm)	216x107(58)	
Elevating Bed (cm)	190x123(103) (O)	
Additional seat rear bed	S	
Locker (useful opening, cm)	115x95	
Max. internal garage height (cm)	120	
Floor / walls / roof thickness (cm)	5,4 / 3 / 3	
Floor / walls / roof material	MTS / VTR / VTR	
Fiberglass roof, hail-proof	S	
Installations		
Burners	3	
Tank capacity : clear water / wastewater (l)	20(118) / 135	
Automatic trivalent fridge (220V, 12V, gas) (l)	135	
Standard heating system	Combi Gas 4 kW	
Space for 2 gas bottles (tot. Max 15 kg)	S	
Bathroom window (double opaque glass)	S	
Integrated entry step	S	
Heated garage locker	S	
Skylight		
Panoramic roof (mm)	S (1000x800)	
Rear skylight (mm)	S (400x400) / O (960x655)	
Central skylight (mm)	S (400x400)	
Dinette skylight (mm) *	S (700x500)	
Double-glazed windows with blind / mosquito net	S	
Equipments		
Thermal blind	S	
Beds with staves	S	
Swivelling LCD holder	S	
Internal LED lightening	S	
Exteriors		
Entrance door with fixed window	S	
Flyscreen for entrance door	S	
Entrance door with two central locking points	S	
XL Entrance door	S	
External LED light	S	

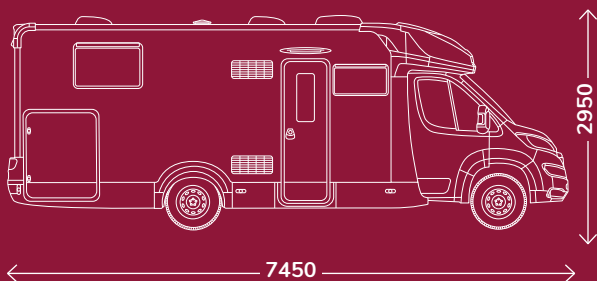

SERIES 800
MC4 870



HOMOLOGATED SEATS	4
BERTHS	3
NUMBER OF BERTHS WITH ELEVATING BED (OPT)	4
SEATS AT THE TABLE	4



PACK

EXPO PACK

- Solar panel
- Rear-view camera
- Pleated blind

TRAVEL FIAT PACK - EXPO PACK required

- 16" alloy wheel rims
- Skid plate, grille, black headlamp surround
- Traction+
- Fog lights

TRAVEL CITROËN PACK - EXPO PACK required

- 16" alloy wheel rims
- Traction+
- Fog lights

PACK MATIC - TRAVEL FIAT PACK AND EXPO PACK required

- Automatic transmission
- 7" touch screen radio Android Auto / Apple Car Play

EXTRA WARM PACK

- Step insulation
- Winter Pack
- Floor film heating
- COMBI 6 E heater

OUTDOOR PACK



- External gas connection
- External multimedia outlet
- Shower in garage
- Guides and fixing rings in garage


SERIES 800 DIGITAL/SATELLITE TV PACK

- 32" TV
- Digital/Satellite aerial

* By choosing the elevating bed option, the dinette skylight 700x500 mm (Midi Heki) will not be available

S= standard O=optional VTR= Fibreglas MTS= multi-layered plywood
The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

Chassis		
Engine, Power	2,2 MJ 140 HP	2,2 140 HP
Maximum technically permissible weight (kg)	3500	3500
Weight unladen in running conditions Min / Max (kg)	2988 / 3157	2988 / 3157
Pay Load Min / Max (kg)	512 / 343	512 / 343
Wheelbase (mm)	4035	4035
Maximum towable weight (kg)	2000	2000
Wheels dimensions	15"	15"
Manual air conditioning	S	S
Driver and Passenger airbag	S	S
Cruise Control with speed limiter	S	S
ABS / ESC	S/S	S/S
Driver and passenger swivelling seats	S	S
Cab seat covers	S	S
Painted front bumper	S	S
Dimensions and places		
External length (mm) / External width (mm)	7450 / 2350	
External height(cm) / Internal height (cm)	295 / 208	
Auxiliary bed in dinette	S	
Rear Bed (cm)	200x80 + 200x80-200x212	
Dimensions Auxiliary bed in Dinette (cm)	216x103(75)	
Elevating Bed (cm)	190X123(103) (O)	
Additional seat rear bed	S	
Locker (useful opening, cm)	115X95	
Max. internal garage height (cm)	115	
Floor / walls / roof thickness (cm)	5,4 / 3 / 3	
Floor / walls / roof material	MTS / VTR / VTR	
Fiberglass roof, hail-proof	S	
Installations		
Burners	3	
Tank capacity : clear water / wastewater (l)	20(118) / 135	
Automatic trivalent fridge (220V, 12V, gas) (l)	145	
Standard heating system	Combi Gas 4 kW	
Space for 2 gas bottles (tot. Max 15 kg)	S	
Bathroom window (double opaque glass)	S	
Integrated entry step	S	
Heated garage locker	S	
Skylight		
Panoramic roof (mm)	S (1000x800)	
Rear skylight (mm)	S (400x400) / O (960x655)	
Central skylight (mm)	S (400x400)	
Dinette skylight (mm) *	S (700x500)	
Double-glazed windows with blind / mosquito net	S	
Equipments		
Thermal blind	S	
Beds with staves	S	
Swivelling LCD holder	S	
Internal LED lightening	S	
Exteriors		
Entrance door with fixed window	S	
Flyscreen for entrance door	S	
Entrance door with two central locking points	S	
XL Entrance door	S	
External LED light	S	

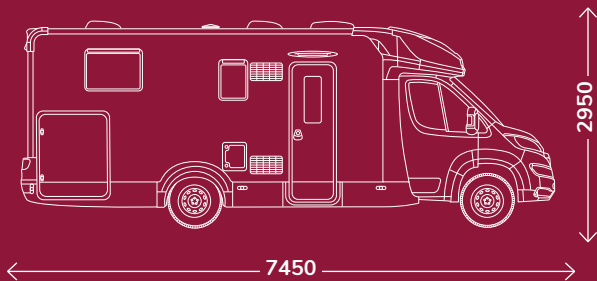

SERIES 800 MC4 873



HOMOLOGATED SEATS	5
BERTHS	3
NUMBER OF BERTHS WITH ELEVATING BED (OPT)	5
SEATS AT THE TABLE	5



PACK

EXPO PACK

- Solar panel
- Rear-view camera
- Pleated blind

TRAVEL FIAT PACK - EXPO PACK required

- 16" alloy wheel rims
- Skid plate, grille, black headlamp surround
- Traction+
- Fog lights

TRAVEL CITROËN PACK - EXPO PACK required

- 16" alloy wheel rims
- Traction+
- Fog lights

PACK MATIC - TRAVEL FIAT PACK AND EXPO PACK required

- Automatic transmission
- 7" touch screen radio Android Auto / Apple Car Play

EXTRA WARM PACK

- Step insulation
- Winter Pack
- Floor film heating
- COMBI 6 E heater

OUTDOOR PACK



- External gas connection
- External multimedia outlet
- Shower in garage
- Guides and fixing rings in garage


SERIES 800 DIGITAL/SATELLITE TV PACK

- 32" TV
- Digital/Satellite aerial

* By choosing the elevating bed option, the dinette skylight 700x500 mm (Midi Heki) will not be available

S= standard O=optional VTR= Fibreglas MTS= multi-layered plywood
The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

Chassis		
Engine, Power	2,2 MJ 140 HP	2,2 140 HP
Maximum technically permissible weight (kg)	3500	3500
Weight unladen in running conditions Min / Max (kg)	2978 / 3072	2978 / 3072
Pay Load Min / Max (kg)	522 / 428	522 / 428
Wheelbase (mm)	4035	4035
Maximum towable weight (kg)	2000	2000
Wheels dimensions	15"	15"
Manual air conditioning	S	S
Driver and Passenger airbag	S	S
Cruise Control with speed limiter	S	S
ABS / ESC	S/S	S/S
Driver and passenger swivelling seats	S	S
Cab seat covers	S	S
Painted front bumper	S	S
Dimensions and places		
External length (mm) / External width (mm)	7450 / 2350	
External height(cm) / Internal height (cm)	295 / 208	
Auxiliary bed in dinette	S	
Rear Bed (cm)	200x80 + 200x80-200x212	
Dimensions Auxiliary bed in Dinette (cm)	216x107(48)	
Elevating Bed (cm)	190X123(103) (O)	
Additional seat rear bed	S	
Locker (useful opening, cm)	115X95	
Max. internal garage height (cm)	121	
Floor / walls / roof thickness (cm)	5,4 / 3 / 3	
Floor / walls / roof material	MTS / VTR / VTR	
Fiberglass roof, hail-proof	S	
Installations		
Burners	3	
Tank capacity : clear water / wastewater (l)	20(118) / 135	
Automatic trivalent fridge (220V, 12V, gas) (l)	145	
Standard heating system	Combi Gas 4 kW	
Space for 2 gas bottles (tot. Max 15 kg)	S	
Bathroom window (double opaque glass)	S	
Integrated entry step	S	
Heated garage locker	S	
Skylight		
Panoramic roof (mm)	S (1000x800)	
Rear skylight (mm)	S (400x400) / O (960x655)	
Central skylight (mm)	S (400x400)	
Dinette skylight (mm) *	S (700x500)	
Double-glazed windows with blind / mosquito net	S	
Equipments		
Thermal blind	S	
Beds with staves	S	
Swivelling LCD holder	S	
Internal LED lightening	S	
Exteriors		
Entrance door with fixed window	S	
Flyscreen for entrance door	S	
Entrance door with two central locking points	S	
XL Entrance door	S	
External LED light	S	

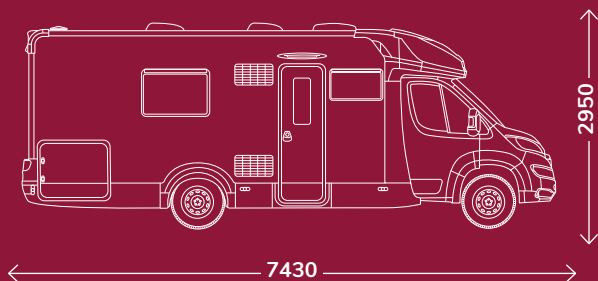

SERIES 800
MC4 875



HOMOLOGATED SEATS	5
BERTHS	3
NUMBER OF BERTHS WITH ELEVATING BED (OPT)	5
SEATS AT THE TABLE	5



PACK

EXPO PACK

- Solar panel
- Rear-view camera
- Pleated blind

TRAVEL FIAT PACK - EXPO PACK required

- 16" alloy wheel rims
- Skid plate, grille, black headlamp surround
- Traction+
- Fog lights

TRAVEL CITROËN PACK - EXPO PACK required

- 16" alloy wheel rims
- Traction+
- Fog lights

PACK MATIC - TRAVEL FIAT PACK AND EXPO PACK required

- Automatic transmission
- 7" touch screen radio Android Auto / Apple Car Play

EXTRA WARM PACK

- Step insulation
- Winter Pack
- Floor film heating
- COMBI 6 E heater

OUTDOOR PACK

- External gas connection
- External multimedia outlet
- Shower in garage
- Guides and fixing rings in garage


SERIES 800 DIGITAL/SATELLITE TV PACK

- 32" TV
- Digital/Satellite aerial

* By choosing the elevating bed option, the dinette skylight 700x500 mm (Midi Heki) will not be available

S= standard O=optional VTR= Fibreglas MTS= multi-layered plywood
The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

Chassis		
Engine, Power	2,2 MJ 140 HP	2,2 140 HP
Maximum technically permissible weight (kg)	3500	3500
Weight unladen in running conditions Min / Max (kg)	3008 / 3072	3008 / 3072
Pay Load Min / Max (kg)	492 / 428	492 / 428
Wheelbase (mm)	4035	4035
Maximum towable weight (kg)	2000	2000
Wheels dimensions	15"	15"
Manual air conditioning	S	S
Driver and Passenger airbag	S	S
Cruise Control with speed limiter	S	S
ABS / ESC	S/S	S/S
Driver and passenger swivelling seats	S	S
Cab seat covers	S	S
Painted front bumper	S	S
Dimensions and places		
External length (mm) / External width (mm)	7430 / 2350	
External height(cm) / Internal height (cm)	295 / 208	
Auxiliary bed in dinette	S	
Rear Bed (cm)	205x75 - 190x75-211x110	
Dimensions Auxiliary bed in Dinette (cm)	216x103(75)	
Elevating Bed (cm)	190x123(103) (O)	
Additional seat rear bed	S	
Locker (useful opening, cm)	95x75 - 85x45	
Max. internal garage height (cm)	85	
Floor / walls / roof thickness (cm)	5,4 / 3 / 3	
Floor / walls / roof material	MTS / VTR / VTR	
Fiberglass roof, hail-proof	S	
Installations		
Burners	3	
Tank capacity : clear water / wastewater (l)	20(118) / 105	
Automatic trivalent fridge (220V, 12V, gas) (l)	145	
Standard heating system	Combi Gas 4 kW	
Space for 2 gas bottles (tot. Max 15 kg)	S	
Bathroom window (double opaque glass)	S	
Shower tray with double drain	S	
Integrated entry step	S	
Heated garage locker	S	
Skylight		
Panoramic roof (mm)	S (1000x800)	
Rear skylight (mm)	S (400x400) / O (960x655)	
Central skylight (mm)	S (400x400)	
Dinette skylight (mm) *	S (700x500)	
Double-glazed windows with blind / mosquito net	S	
Equipments		
Thermal blind	S	
Beds with staves	S	
Swivelling LCD holder	S	
Internal LED lightening	S	
Exteriors		
Entrance door with fixed window	S	
Flyscreen for entrance door	S	
Entrance door with two central locking points	S	
XL Entrance door	S	
External LED light	S	

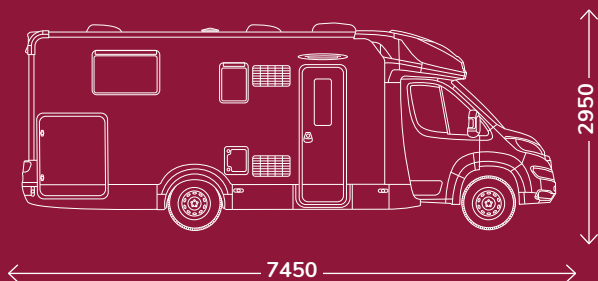

**SERIES 800
MC4 879**



HOMOLOGATED SEATS	5
BERTHS	3
NUMBER OF BERTHS WITH ELEVATING BED (OPT)	5
SEATS AT THE TABLE	5



PACK

EXPO PACK

- Solar panel
- Rear-view camera
- Pleated blind

TRAVEL FIAT PACK - EXPO PACK required

- 16" alloy wheel rims
- Skid plate, grille, black headlamp surround
- Traction+
- Fog lights

TRAVEL CITROËN PACK - EXPO PACK required

- 16" alloy wheel rims
- Traction+
- Fog lights

PACK MATIC - TRAVEL FIAT PACK AND EXPO PACK required

- Automatic transmission
- 7" touch screen radio Android Auto / Apple Car Play

EXTRA WARM PACK

- Step insulation
- Winter Pack
- Floor film heating
- COMBI 6 E heater

OUTDOOR PACK

- External gas connection
- External multimedia outlet
- Shower in garage
- Guides and fixing rings in garage


SERIES 800 DIGITAL/SATELLITE TV PACK

- 32" TV
- Digital/Satellite aerial

* By choosing the elevating bed option, the dinette skylight 700x500 mm (Midi Heki) will not be available

S= standard O=optional VTR= Fibreglas MTS= multi-layered plywood
The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

Chassis		
Engine, Power	2,2 MJ 140 HP	2,2 140 HP
Maximum technically permissible weight (kg)	3500	3500
Weight unladen in running conditions Min / Max (kg)	2978 / 3072	2978 / 3072
Pay Load Min / Max (kg)	522 / 428	522 / 428
Wheelbase (mm)	4035	4035
Maximum towable weight (kg)	2000	2000
Wheels dimensions	15"	15"
Manual air conditioning	S	S
Driver and Passenger airbag	S	S
Cruise Control with speed limiter	S	S
ABS / ESC	S/S	S/S
Driver and passenger swivelling seats	S	S
Cab seat covers	S	S
Painted front bumper	S	S
Dimensions and places		
External length (mm) / External width (mm)	7450 / 2350	
External height(cm) / Internal height (cm)	295 / 208	
Auxiliary bed in dinette	S	
Rear Bed (cm)	190x150	
Rear bed height adjustment	S	
Dimensions Auxiliary bed in Dinette (cm)	216x107(48)	
Elevating Bed (cm)	190x123(103) (O)	
Locker (useful opening, cm)	115x95	
Max. internal garage height (cm)	125	
Floor / walls / roof thickness (cm)	5,4 / 3 / 3	
Floor / walls / roof material	MTS / VTR / VTR	
Fiberglass roof, hail-proof	S	
Installations		
Burners	3	
Tank capacity : clear water / wastewater (l)	20(118) / 135	
Automatic trivalent fridge (220V, 12V, gas) (l)	145	
Standard heating system	Combi Gas 4 kW	
Space for 2 gas bottles (tot. Max 15 kg)	S	
Bathroom window (double opaque glass)	S	
Integrated entry step	S	
Heated garage locker	S	
Skylight		
Panoramic roof (mm)	S (1000x800)	
Rear skylight (mm)	S (400x400) / O (960x655)	
Central skylight (mm)	S (400x400)	
Dinette skylight (mm) *	S (700x500)	
Double-glazed windows with blind / mosquito net	S	
Equipments		
Thermal blind	S	
Beds with staves	S	
Swivelling LCD holder	S	
Internal LED lightening	S	
Exteriors		
Entrance door with fixed window	S	
Flyscreen for entrance door	S	
Entrance door with two central locking points	S	
XL Entrance door	S	
External LED light	S	

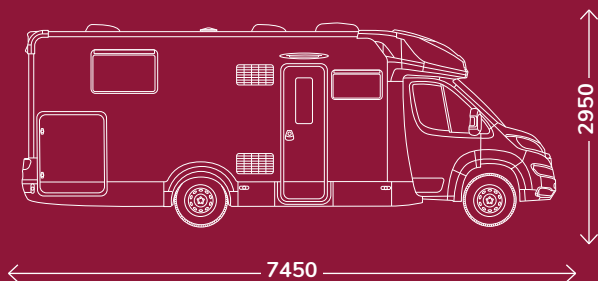

SERIES 800
MC4 881



HOMOLOGATED SEATS	4
BERTHS	3
NUMBER OF BERTHS WITH ELEVATING BED (OPT)	4
SEATS AT THE TABLE	4



PACK

EXPO PACK

- Solar panel
- Rear-view camera
- Pleated blind

TRAVEL FIAT PACK - EXPO PACK required

- 16" alloy wheel rims
- Skid plate, grille, black headlamp surround
- Traction+
- Fog lights

TRAVEL CITROËN PACK - EXPO PACK required

- 16" alloy wheel rims
- Traction+
- Fog lights

PACK MATIC - TRAVEL FIAT PACK AND EXPO PACK required

- Automatic transmission
- 7" touch screen radio Android Auto / Apple Car Play

EXTRA WARM PACK

- Step insulation
- Winter Pack
- Floor film heating
- COMBI 6 E heater

OUTDOOR PACK

- External gas connection
- External multimedia outlet
- Shower in garage
- Guides and fixing rings in garage


SERIES 800 DIGITAL/SATELLITE TV PACK

- 32" TV
- Digital/Satellite aerial

* By choosing the elevating bed option, the dinette skylight 700x500 mm (Midi Heki) will not be available

S= standard O=optional VTR= Fibreglas MTS= multi-layered plywood
The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.15 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

Chassis		
Engine, Power	2,2 MJ 140 HP	2,2 140 HP
Maximum technically permissible weight (kg)	3500	3500
Weight unladen in running conditions Min / Max (kg)	2988 / 3157	2988 / 3157
Pay Load Min / Max (kg)	512 / 343	512 / 343
Wheelbase (mm)	4035	4035
Maximum towable weight (kg)	2000	2000
Wheels dimensions	15"	15"
Manual air conditioning	S	S
Driver and Passenger airbag	S	S
Cruise Control with speed limiter	S	S
ABS / ESC	S/S	S/S
Driver and passenger swivelling seats	S	S
Cab seat covers	S	S
Painted front bumper	S	S
Dimensions and places		
External length (mm) / External width (mm)	7450 / 2350	
External height(cm) / Internal height (cm)	295 / 208	
Auxiliary bed in dinette	S	
Rear Bed (cm)	190x150	
Rear bed height adjustment	S	
Dimensions Auxiliary bed in Dinette (cm)	216x103(75)	
Elevating Bed (cm)	190x123(103) (O)	
Locker (useful opening, cm)	115x95	
Max. internal garage height (cm)	125	
Floor / walls / roof thickness (cm)	5,4 / 3 / 3	
Floor / walls / roof material	MTS / VTR / VTR	
Fiberglass roof, hail-proof	S	
Installations		
Burners	3	
Tank capacity : clear water / wastewater (l)	20(118) / 135	
Automatic trivalent fridge (220V, 12V, gas) (l)	145	
Standard heating system	Combi Gas 4 kW	
Space for 2 gas bottles (tot. Max 15 Kg)	S	
Bathroom window (double opaque glass)	S	
Integrated and isolated entry step	S	
Heated garage locker	S	
Skylight		
Panoramic roof (mm)	S (1000x800)	
Rear skylight (mm)	S (400x400) / O (960x655)	
Central skylight (mm)	S (400x400)	
Dinette skylight (mm) *	S (700x500)	
Double-glazed windows with blind / mosquito net	S	
Equipments		
Thermal blind	S	
Beds with staves	S	
Swivelling LCD holder	S	
Internal LED lightening	S	
Exteriors		
Entrance door with fixed window	S	
Flyscreen for entrance door	S	
Entrance door with two central locking points	S	
XL Entrance door	S	
External LED light	S	

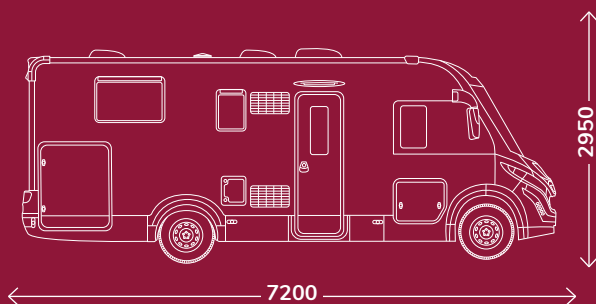

SERIES 800 NEVIS 862



HOMOLOGATED SEATS	4
BERTHS	4
SEATS AT THE TABLE	4



PACK

EXPO NEVIS PACK

- Solar panel
- Rear view camera
- 16" alloy wheel rims
- Traction+

EXPO NEVIS 180 HP PACK

- 180 HP engine
- Solar panel
- Rear view camera
- 16" alloy wheel rims
- Traction+

PACK MATIC - EXPO NEVIS PACK required

- Automatic transmission
- 7" touch screen radio Android Auto / Apple Car Play

EXTRA WARM PACK

- Step insulation
- Winter Pack
- Floor film heating
- COMBI 6 E heater

OUTDOOR PACK

- External gas connection
- External multimedia outlet
- Shower in garage
- Guides and fixing rings in garage


SERIES 800 DIGITAL/SATELLITE TV PACK

- 32" TV
- Digital/Satellite aerial

Chassis	
Engine, Power	2,2 MJ 140 HP
Maximum technically permissible weight (Kg)	3500
Weight unladen in running conditions Min / Max (Kg)	2898 / 3083
Pay Load Min / Max (Kg)	602 / 417
Wheelbase (mm)	4035
Maximum towable weight (kg)	2000
Wheels dimensions	15"
Manual air conditioning	S
Driver and Passenger airbag	S
Cruise Control with speed limiter	S
ABS / ESC	S/S
Driver and passenger swivelling seats	S
DRL LED (Day running light)	S
Dimensions and places	
External length (mm) / External width (mm)	7200 / 2350
External height(cm) / Internal height (cm)	295 / 208
Auxiliary bed in dinette	O
Rear Bed (cm)	190x150
Rear bed height adjustment	S
Dimensions Auxiliary bed in Dinette (cm)	216x116(54) (O)
Elevating Bed (cm)	187x134
Locker (useful opening, cm)	115x95
Max. internal garage height (cm)	117
Floor / walls / roof thickness (cm)	5,4 / 3 / 3
Floor / walls / roof material	MTS / VTR / VTR
Fiberglass roof, hail-proof	S
Installations	
Burners	3
Tank capacity : clear water / wastewater (l)	20(120) / 135
Automatic trivalent fridge (220V, 12V, gas) (l)	145
Standard heating system	Combi Gas 4 kW
Space for 2 gas bottles (tot. Max 15 kg)	S
Bathroom window (double opaque glass)	S
Integrated entry step	S
Heated garage locker	S
Skylight	
Rear skylight (mm)	S (400x400) / O (960x655)
Central skylight (mm)	S (400x400)
Dinette skylight (mm)	S (700x500) / O (960x655)
Double-glazed windows with blind / mosquito net	S
Equipments	
Pleated cab blind	S
Beds with staves	S
Swivelling LCD holder	S
Internal LED lightening	S
Exteriors	
Entrance door with fixed window	S
Flyscreen for entrance door	S
Entrance door with two central locking points	S
XL Entrance door	S
External LED light	S

S= standard O=optional VTR= Fibreglas MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.7 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

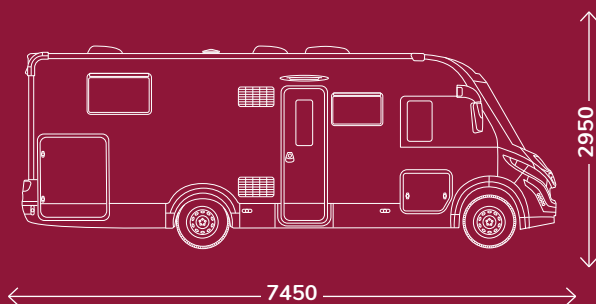

SERIES 800 NEVIS 870



HOMOLOGATED SEATS	4
BERTHS	4
SEATS AT THE TABLE	4



PACK

EXPO NEVIS PACK

- Solar panel
- Rear view camera
- 16" alloy wheel rims
- Traction+

EXPO NEVIS 180 HP PACK

- 180 HP engine
- Solar panel
- Rear view camera
- 16" alloy wheel rims
- Traction+

PACK MATIC - EXPO NEVIS PACK required

- Automatic transmission
- 7" touch screen radio Android Auto / Apple Car Play

EXTRA WARM PACK

- Step insulation
- Winter Pack
- Floor film heating
- COMBI 6 E heater

OUTDOOR PACK

- External gas connection
- External multimedia outlet
- Shower in garage
- Guides and fixing rings in garage


SERIES 800 DIGITAL/SATELLITE TV PACK

- 32" TV
- Digital/Satellite aerial

Chassis	
Engine, Power	2,2 MJ 140 HP
Maximum technically permissible weight (Kg)	3500
Weight unladen in running conditions Min / Max (Kg)	2978 / 3157
Pay Load Min / Max (Kg)	522 / 343
Wheelbase (mm)	4035
Maximum towable weight (kg)	2000
Wheels dimensions	15"
Manual air conditioning	S
Driver and Passenger airbag	S
Cruise Control with speed limiter	S
ABS / ESC	S/S
Driver and passenger swivelling seats	S
DRL LED (Day running light)	S
Dimensions and places	
External length (mm) / External width (mm)	7450 / 2350
External height(cm) / Internal height (cm)	295 / 208
Auxiliary bed in dinette	O
Rear Bed (cm)	200x80 + 200x80-200x212
Dimensions Auxiliary bed in Dinette (cm)	216x103(75) (O)
Elevating Bed (cm)	187x134
Additional seat rear bed	S
Locker (useful opening, cm)	115x95
Max. internal garage height (cm)	115
Floor / walls / roof thickness (cm)	5,4 / 3 / 3
Floor / walls / roof material	MTS / VTR / VTR
Fiberglass roof, hail-proof	S
Installations	
Burners	3
Tank capacity : clear water / wastewater (l)	20(118) / 135
Automatic trivalent fridge (220V, 12V, gas) (l)	145
Standard heating system	Combi Gas 4 kW
Space for 2 gas bottles (tot. Max 15 kg)	S
Bathroom window (double opaque glass)	S
Integrated entry step	S
Heated garage locker	S
Skylight	
Rear skylight (mm)	S (400x400) / O (960x655)
Central skylight (mm)	S (400x400)
Dinette skylight (mm)	S (700x500) / O (960x655)
Double-glazed windows with blind / mosquito net	S
Equipments	
Pleated cab blind	S
Beds with staves	S
Swivelling LCD holder	S
Internal LED lightening	S
Exteriors	
Entrance door with fixed window	S
Flyscreen for entrance door	S
Entrance door with two central locking points	S
XL Entrance door	S
External LED light	S

S= standard O=optional VTR= Fiberglass MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.7 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

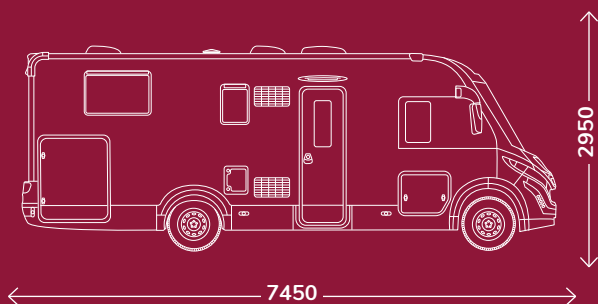

SERIES 800 NEVIS 873



HOMOLOGATED SEATS	5
BERTHS	5
SEATS AT THE TABLE	5



PACK

EXPO NEVIS PACK

- Solar panel
- Rear view camera
- 16" alloy wheel rims
- Traction+

EXPO NEVIS 180 HP PACK

- 180 HP engine
- Solar panel
- Rear view camera
- 16" alloy wheel rims
- Traction+

PACK MATIC - EXPO NEVIS PACK required

- Automatic transmission
- 7" touch screen radio Android Auto / Apple Car Play

EXTRA WARM PACK

- Step insulation
- Winter Pack
- Floor film heating
- COMBI 6 E heater

OUTDOOR PACK

- External gas connection
- External multimedia outlet
- Shower in garage
- Guides and fixing rings in garage


SERIES 800 DIGITAL/SATELLITE TV PACK

- 32" TV
- Digital/Satellite aerial

Chassis	
Engine, Power	2,2 MJ 140 HP
Maximum technically permissible weight (Kg)	3500
Weight unladen in running conditions Min / Max (Kg)	2968 / 3072
Pay Load Min / Max (Kg)	532 / 428
Wheelbase (mm)	4035
Maximum towable weight (kg)	2000
Wheels dimensions	15"
Manual air conditioning	S
Driver and Passenger airbag	S
Cruise Control with speed limiter	S
ABS / ESC	S/S
Driver and passenger swivelling seats	S
DRL LED (Day running light)	S
Dimensions and places	
External length (mm) / External width (mm)	7450 / 2350
External height(cm) / Internal height (cm)	295 / 208
Auxiliary bed in dinette	S
Rear Bed (cm)	200x80 + 200x80-200x212
Dimensions Auxiliary bed in Dinette (cm)	216x110(48)
Elevating Bed (cm)	187x134
Additional seat rear bed	S
Locker (useful opening, cm)	115x95
Max. internal garage height (cm)	121
Floor / walls / roof thickness (cm)	5,4 / 3 / 3
Floor / walls / roof material	MTS / VTR / VTR
Fiberglass roof, hail-proof	S
Installations	
Burners	3
Tank capacity : clear water / wastewater (l)	20(118) / 135
Automatic trivalent fridge (220V, 12V, gas) (l)	145
Standard heating system	Combi Gas 4 kW
Space for 2 gas bottles (tot. Max 15 kg)	S
Bathroom window (double opaque glass)	S
Integrated entry step	S
Heated garage locker	S
Skylight	
Rear skylight (mm)	S (400x400) / O (960x655)
Central skylight (mm)	S (400x400)
Dinette skylight (mm)	S (700x500) / O (960x655)
Double-glazed windows with blind / mosquito net	S
Equipments	
Pleated cab blind	S
Beds with staves	S
Swivelling LCD holder	S
Internal LED lightening	S
Exteriors	
Entrance door with fixed window	S
Flyscreen for entrance door	S
Entrance door with two central locking points	S
XL Entrance door	S
External LED light	S

S= standard O=optional VTR= Fibreglas MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.7 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

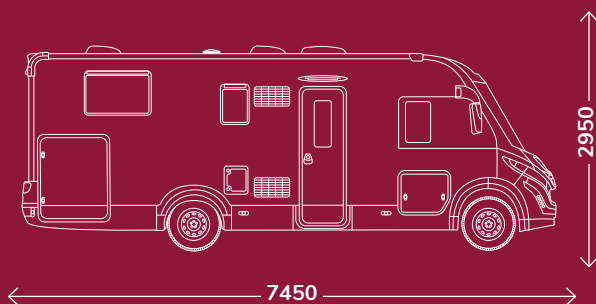

SERIES 800 NEVIS 879



HOMOLOGATED SEATS	5
BERTHS	5
SEATS AT THE TABLE	5



PACK

EXPO NEVIS PACK

- Solar panel
- Rear view camera
- 16" alloy wheel rims
- Traction+

EXPO NEVIS 180 HP PACK

- 180 HP engine
- Solar panel
- Rear view camera
- 16" alloy wheel rims
- Traction+

PACK MATIC - EXPO NEVIS PACK required

- Automatic transmission
- 7" touch screen radio Android Auto / Apple Car Play

EXTRA WARM PACK

- Step insulation
- Winter Pack
- Floor film heating
- COMBI 6 E heater

OUTDOOR PACK

- External gas connection
- External multimedia outlet
- Shower in garage
- Guides and fixing rings in garage


SERIES 800 DIGITAL/SATELLITE TV PACK

- 32" TV
- Digital/Satellite aerial

Chassis	
Engine, Power	2,2 MJ 140 HP
Maximum technically permissible weight (Kg)	3500
Weight unladen in running conditions Min / Max (Kg)	2968 / 3072
Pay Load Min / Max (Kg)	532 / 428
Wheelbase (mm)	4035
Maximum towable weight (kg)	2000
Wheels dimensions	15"
Manual air conditioning	S
Driver and Passenger airbag	S
Cruise Control with speed limiter	S
ABS / ESC	S/S
Driver and passenger swivelling seats	S
DRL LED (Day running light)	S
Dimensions and places	
External length (mm) / External width (mm)	7450 / 2350
External height(cm) / Internal height (cm)	295 / 208
Auxiliary bed in dinette	S
Rear Bed (cm)	190x150
Rear bed height adjustment	S
Dimensions Auxiliary bed in Dinette (cm)	216x110(48)
Elevating Bed (cm)	187x134
Locker (useful opening, cm)	115x95
Max. internal garage height (cm)	125
Floor / walls / roof thickness (cm)	5,4 / 3 / 3
Floor / walls / roof material	MTS / VTR / VTR
Fiberglass roof, hail-proof	S
Installations	
Burners	3
Tank capacity : clear water / wastewater (l)	20(118) / 135
Automatic trivalent fridge (220V, 12V, gas) (l)	145
Standard heating system	Combi Gas 4 kW
Space for 2 gas bottles (tot. Max 15 kg)	S
Bathroom window (double opaque glass)	S
Integrated entry step	S
Heated garage locker	S
Skylight	
Rear skylight (mm)	S (400x400) / O (960x655)
Central skylight (mm)	S (400x400)
Dinette skylight (mm)	S (700x500) / O (960x655)
Double-glazed windows with blind / mosquito net	S
Equipments	
Pleated cab blind	S
Beds with staves	S
Swivelling LCD holder	S
Internal LED lightening	S
Exteriors	
Entrance door with fixed window	S
Flyscreen for entrance door	S
Entrance door with two central locking points	S
XL Entrance door	S
External LED light	S

S= standard O=optional VTR= Fibreglas MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.7 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

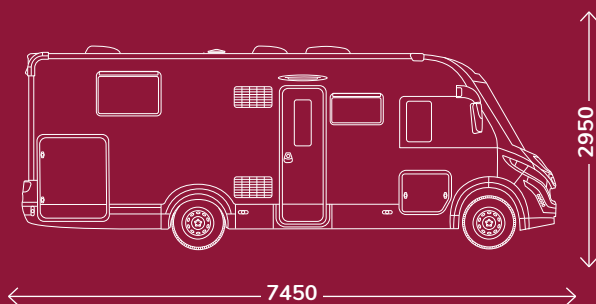

SERIES 800 NEVIS 881



HOMOLOGATED SEATS	4
BERTHS	4
SEATS AT THE TABLE	4



PACK

EXPO NEVIS PACK

- Solar panel
- Rear view camera
- 16" alloy wheel rims
- Traction+

EXPO NEVIS 180 HP PACK

- 180 HP engine
- Solar panel
- Rear view camera
- 16" alloy wheel rims
- Traction+

PACK MATIC - EXPO NEVIS PACK required

- Automatic transmission
- 7" touch screen radio Android Auto / Apple Car Play

EXTRA WARM PACK

- Step insulation
- Winter Pack
- Floor film heating
- COMBI 6 E heater

OUTDOOR PACK

- External gas connection
- External multimedia outlet
- Shower in garage
- Guides and fixing rings in garage

SERIES 800 DIGITAL/SATELLITE TV PACK

- 32" TV
- Digital/Satellite aerial

Chassis	
Engine, Power	2,2 MJ 140 HP
Maximum technically permissible weight (Kg)	3500
Weight unladen in running conditions Min / Max (Kg)	2978 / 3157
Pay Load Min / Max (Kg)	522 / 343
Wheelbase (mm)	4035
Maximum towable weight (kg)	2000
Wheels dimensions	15"
Manual air conditioning	S
Driver and Passenger airbag	S
Cruise Control with speed limiter	S
ABS / ESC	S/S
Driver and passenger swivelling seats	S
DRL LED (Day running light)	S
Dimensions and places	
External length (mm) / External width (mm)	7450 / 2350
External height(cm) / Internal height (cm)	295 / 208
Auxiliary bed in dinette	O
Rear Bed (cm)	190x150
Rear bed height adjustment	S
Dimensions Auxiliary bed in Dinette (cm)	216x103(75) (O)
Elevating Bed (cm)	187x134
Locker (useful opening, cm)	115x95
Max. internal garage height (cm)	125
Floor / walls / roof thickness (cm)	5,4 / 3 / 3
Floor / walls / roof material	MTS / VTR / VTR
Fiberglass roof, hail-proof	S
Installations	
Burners	3
Tank capacity : clear water / wastewater (l)	20(118) / 135
Automatic trivalent fridge (220V, 12V, gas) (l)	145
Standard heating system	Combi Gas 4 kW
Space for 2 gas bottles (tot. Max 15 kg)	S
Bathroom window (double opaque glass)	S
Integrated entry step	S
Heated garage locker	S
Skylight	
Rear skylight (mm)	S (400x400) / O (960x655)
Central skylight (mm)	S (400x400)
Dinette skylight (mm)	S (700x500) / O (960x655)
Double-glazed windows with blind / mosquito net	S
Equipments	
Pleated cab blind	S
Beds with staves	S
Swivelling LCD holder	S
Internal LED lightening	S
Exteriors	
Entrance door with fixed window	S
Flyscreen for entrance door	S
Entrance door with two central locking points	S
XL Entrance door	S
External LED light	S

S= standard O=optional VTR= Fiberglass MTS= multi-layered plywood

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.7 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.



The masses indicated in the technical data sheets refer to the provisions of European Directive 2007/46/EC.

MASS IN RUNNING ORDER

It includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and a gas tank for living purposes (20 kg). The mass in running order, and consequently the payload and/or certified seats may vary depending on the accessories installed.

PAYLOAD

This consists of the difference between the maximum technically permissible laden mass and the mass in running order. It includes elements for living purposes, the transported passengers defined by the manufacturer (driver excluded), and the personal effects.

The payload calculation is based on the following parameters: 75 kg for each passenger (driver excluded), 10 kg of baggage for each passenger and for the driver, 10 kg for each metre of length of the vehicle, plus the remaining payload, which can be used for the installation of accessories or for additional baggage.

All masses and loads of the empty vehicle have a tolerance of +/- 5%, in compliance with Directive 2007/46/EC.

Any optional equipment increases the mass in running order and decreases the payload.

The weight of non-standard accessories is not included in the mass in running order indicated in this catalogue. Additional accessories and devices reduce the payload by a quantity equal to their weight; the incidence of the weight of the individual accessories is shown in the special column in the technical data sheets or can be requested at our dealers. In case certain accessories are installed (for example, additional elements such as coupling device or motorbike rack), the mass of these accessories will affect the payload, possibly reducing it along with the number of certified seats. Please note that the law does not allow the maximum permissible mass to be exceeded, which can be consulted under the specific heading of the data sheets. Please make sure that the maximum loads on the axles and the maximum technically permissible load mass are not exceeded during the complete loading phase of the vehicle. The regulations and requirements of each country may entail changes in the characteristics of this table. The number of certified seats may vary depending on the traffic regulations in force in each country. When driving, the fresh water tank must be filled to a maximum of 20 litres.