

HOMOLOGATED SEATS	4
BERTHS	2+1



PACK

DRIVE PACK

- Entrance door flyscreen
- Electric step
- Cab pleated blind

SILVER PACK

- Solar panel
- Enclosure

LOOK PACK

- Black grille, headlights and skid plate
- 16" alloy wheel rims
- Techno Trim
- Leather steering wheel and gear knob

MEDIA PACK

- 7" touch screen radio, Android Auto / Apple Car Play with steering wheel controls
- Rear view camera

MEDIA PACK 10"

- 10" touch screen radio, Android Auto / Apple Car Play with steering wheel controls
- Rear view camera
- Automatic climate control system


MATIC PACK - Available starting from 140 HP

- Automatic transmission
- 16" alloy wheel rims

Chassis	
Engine, Power	2,2 MJ 120 HP
Maximum technically permissible weight (kg)	3300
Weight unladen in running conditions Min / Max (kg)	2795 / 2980
Pay Load Min / Max (kg)	505 / 320
Wheelbase (mm)	3450
Maximum towable weight (kg)	2500
Wheels dimensions	15"
Manual air conditioning	S
Driver and Passenger airbag	S
Cruise Control with speed limiter	S
ABS / ESC	S/S
Swivelling driver' and passenger's seat	S
Cab seat covers	S
Painted cab	WHITE
Painted front bumper	S
Dimensions and places	
External length (mm)	5410
External width (mm)	2050
External height(cm) / Internal height (cm)	265 / 189
Rear bed (cm)	186x132(116)
Supplementary bed in dinette	S
Dimensions supplementary bed in dinette (cm)	146x93(50)
Additional bed kit in dinette (cm)	O (188x120/50)
Beds with staves	S
Skylight	
Panoramic skylight 700x500 mm	S
400x400 mm skylight	S
Openable rear windows	S
Double-glazed windows with blind / mosquito net	S
Installations	
Burners	2
Tank capacity : clear water / wastewater (l)	90/75
Compressor fridge (l)	70
Standard heating system	COMBI GAS 4kW
Space for 2 gas bottles (tot. Max 7 kg)	S
Bathroom window (double opaque glass)	S
Internal insulation material	POLYURETHANE FOAM
Floor thickness (mm)	36
Equipments	
Lifting roof with integrated double bed	O
Stowage above the cabin	S
Cab carpet	S
Table extensions in dinette	S
Internal LED lightening	S

S= standard O=optional

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.7 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

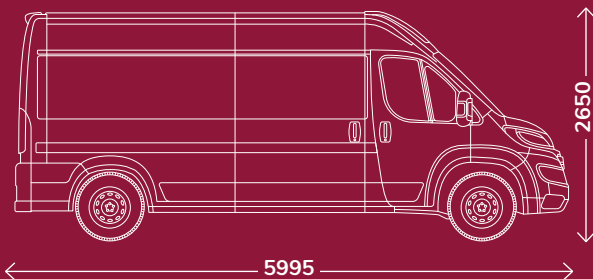

HOMOLOGATED SEATS	4
BERTHS	2+1



PACK

DRIVE PACK

- Entrance door flyscreen
- Electric step
- Cab pleated blind

SILVER PACK

- Solar panel
- Enclosure

LOOK PACK

- Black grille, headlights and skid plate
- 16" alloy wheel rims
- Techno Trim
- Leather steering wheel and gear knob

MEDIA PACK

- 7" touch screen radio, Android Auto / Apple Car Play with steering wheel controls
- Rear view camera

MEDIA PACK 10"

- 10" touch screen radio, Android Auto / Apple Car Play with steering wheel controls
- Rear view camera
- Automatic climate control system

MATIC PACK - Available starting from 140 HP


- Automatic transmission
- 16" alloy wheel rims

Chassis	
Engine, Power	2,2 MJ 120 HP
Maximum technically permissible weight (kg)	3300
Weight unladen in running conditions Min / Max (kg)	2795 / 2975
Pay Load Min / Max (kg)	505 / 325
Wheelbase (mm)	4035
Maximum towable weight (kg)	2500
Wheels dimensions	15"
Manual air conditioning	S
Driver and Passenger airbag	S
Cruise Control with speed limiter	S
ABS / ESC	S/S
Swivelling driver' and passenger's seat	S
Cab seat covers	S
Painted cab	WHITE
Painted front bumper	S
Dimensions and places	
External length (mm)	5995
External width (mm)	2050
External height(cm) / Internal height (cm)	265 / 189
Rear bed (cm)	186x149
Supplementary bed in dinette	S
Dimensions supplementary bed in dinette (cm)	160x95(50)
Additional bed kit in dinette (cm)	O (188x120/50)
Beds with staves	S
Skylight	
Panoramic skylight 700x500 mm	S
400x400 mm skylight	S
Openable rear windows	S
Double-glazed windows with blind / mosquito net	S
Installations	
Burners	2
Tank capacity : clear water / wastewater (l)	85 (20) / 90
Compressor fridge (l)	70
Standard heating system	COMBI GAS 4kW
Space for 2 gas bottles (tot. Max 7 kg)	S
Bathroom window (double opaque glass)	S
Internal insulation material	POLYURETHANE FOAM
Floor thickness (mm)	36
Equipments	
Lifting roof with integrated double bed	O
Stowage above the cabin	S
Cab carpet	S
Table extensions in dinette	S
Internal LED lightening	S

S= standard O=optional

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.7 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

MENFYS 3 MAXI

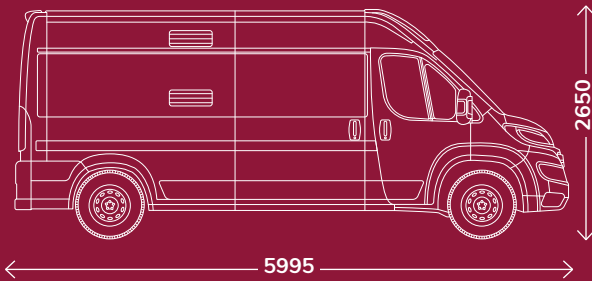

HOMOLOGATED SEATS	4
BERTHS	4+1



PACK

DRIVE PACK

- Entrance door flyscreen
- Electric step
- Cab pleated blind

SILVER PACK

- Solar panel
- Enclosure

LOOK PACK

- Black grille, headlights and skid plate
- 16" alloy wheel rims
- Techno Trim
- Leather steering wheel and gear knob

MEDIA PACK

- 7" touch screen radio, Android Auto / Apple Car Play with steering wheel controls
- Rear view camera

MEDIA PACK 10"

- 10" touch screen radio, Android Auto / Apple Car Play with steering wheel controls
- Rear view camera
- Automatic climate control system

MATIC PACK - Available starting from 140 HP

- Automatic transmission
- 16" alloy wheel rims

Chassis	
Engine, Power	2,2 MJ 120 HP
Maximum technically permissible weight (kg)	3300
Weight unladen in running conditions Min / Max (kg)	2815 / 2975
Pay Load Min / Max (kg)	485 / 325
Wheelbase (mm)	4035
Maximum towable weight (kg)	2500
Wheels dimensions	15"
Manual air conditioning	S
Driver and Passenger airbag	S
Cruise Control with speed limiter	S
ABS / ESC	S/S
Swivelling driver' and passenger's seat	S
Cab seat covers	S
Painted cab	WHITE
Painted front bumper	S
Dimensions and places	
External length (mm)	5995
External width (mm)	2050
External height(cm) / Internal height (cm)	265 / 189
Rear bed (cm)	186x144 - 184x133
Supplementary bed in dinette	S
Dimensions supplementary bed in dinette (cm)	160x95(50)
Additional bed kit in dinette (cm)	O (188x120/50)
Beds with staves	S
Skylight	
Panoramic skylight 700x500 mm	S
400x400 mm skylight	S
Openable rear windows	S
Double-glazed windows with blind / mosquito net	S
Installations	
Burners	2
Tank capacity : clear water / wastewater (l)	90 (20) / 90
Compressor fridge (l)	70
Standard heating system	COMBI GAS 4kW
Space for 2 gas bottles (tot. Max 7 kg)	S
Bathroom window (double opaque glass)	S
Internal insulation material	POLYURETHANE FOAM
Floor thickness (mm)	36
Equipments	
Lifting roof with integrated double bed	O
Stowage above the cabin	S
Cab carpet	S
Table extensions in dinette	S
Internal LED lightening	S

S= standard O=optional

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.7 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.



MENFYS 4

HOMOLOGATED SEATS	4
BERTHS	2+1



PACK

DRIVE PACK

- Entrance door flyscreen
- Electric step
- Cab pleated blind

SILVER PACK

- Solar panel
- Enclosure

LOOK PACK

- Black grille, headlights and skid plate
- 16" alloy wheel rims
- Techno Trim
- Leather steering wheel and gear knob

MEDIA PACK

- 7" touch screen radio, Android Auto / Apple Car Play with steering wheel controls
- Rear view camera

MEDIA PACK 10"

- 10" touch screen radio, Android Auto / Apple Car Play with steering wheel controls
- Rear view camera
- Automatic climate control system


MATIC PACK - Available starting from 140 HP

- Automatic transmission
- 16" alloy wheel rims

Chassis	
Engine, Power	2,2 MJ 140 HP
Maximum technically permissible weight (kg)	3500
Weight unladen in running conditions Min / Max (kg)	2905 / 3165
Pay Load Min / Max (kg)	595 / 335
Wheelbase (mm)	4035
Maximum towable weight (kg)	2500
Wheels dimensions	15"
Manual air conditioning	S
Driver and Passenger airbag	S
Cruise Control with speed limiter	S
ABS / ESC	S/S
Swivelling driver' and passenger's seat	S
Cab seat covers	S
Painted cab	WHITE
Painted front bumper	S
Dimensions and places	
External length (mm)	6365
External width (mm)	2050
External height(cm) / Internal height (cm)	265 / 189
Rear bed (cm)	195x80 - 186x80
Supplementary bed in dinette	S
Dimensions supplementary bed in dinette (cm)	156x95(50)
Additional bed kit in dinette (cm)	O (188x120/50)
Beds with staves	S
Skylight	
Panoramic skylight 700x500 mm	S
400x400 mm skylight	S
Openable rear windows	S
Double-glazed windows with blind / mosquito net	S
Installations	
Burners	2
Tank capacity : clear water / wastewater (l)	85 (20) / 90
Compressor fridge (l)	70
Standard heating system	COMBI GAS 4kW
Space for 2 gas bottles (tot. Max 7 kg)	S
Bathroom window (double opaque glass)	S
Internal insulation material	POLYURETHANE FOAM
Floor thickness (mm)	36
Equipments	
Lifting roof with integrated double bed	O
Stowage above the cabin	S
Cab carpet	S
Table extensions in dinette	S
Internal LED lightening	S

S= standard O=optional

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.7 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

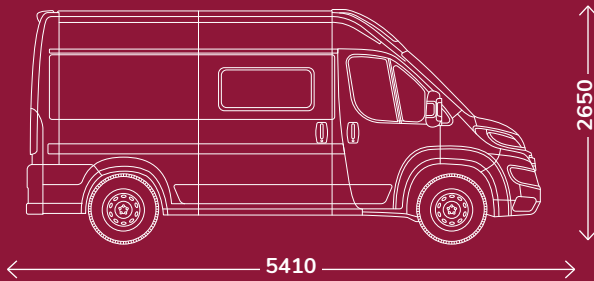

MENFYS 1 S-LINE

HOMOLOGATED SEATS	4
BERTHS	2



PACK

DRIVE PACK

- Entrance door flyscreen
- Electric step
- Cab pleated blind

SILVER PACK

- Solar panel
- Enclosure

LOOK PACK

- Black grille, headlights and skid plate
- 16" alloy wheel rims
- Techno Trim
- Leather steering wheel and gear knob

MEDIA PACK

- 7" touch screen radio, Android Auto / Apple Car Play with steering wheel controls
- Rear view camera

MEDIA PACK 10"


- 10" touch screen radio, Android Auto / Apple Car Play with steering wheel controls
- Rear view camera
- Automatic climate control system

MATIC PACK - Available starting from 140 HP

- Automatic transmission
- 16" alloy wheel rims

Chassis	
Engine, Power	2,2 MJ 120 HP
Maximum technically permissible weight (kg)	3300
Weight unladen in running conditions Min / Max (kg)	2865 / 2980
Pay Load Min / Max (kg)	435 / 320
Wheelbase (mm)	3450
Maximum towable weigh (kg)	2500
Wheels dimensions	15"
Manual air conditioning	S
Driver and Passenger airbag	S
Cruise Control with speed limiter	S
ABS / ESC	S/S
Swivelling driver' and passenger's seat	S
Cab seat covers	S
Painted cab	WHITE
Painted front bumper	S
Dimensions and places	
External lenght (mm)	5410
External width (mm)	2050
External height(cm) / Internal height (cm)	265 / 189
Rear bed (cm)	186x132(116)
Additional bed kit in dinette (cm)	O (188x120/50)
Beds with staves	S
Skylight	
Panoramic skylight 700x500 mm	S
400x400 mm skylight	S
Fixed, panorama roof in the cab	O
Openable rear windows	S
Double-glazed windows with blind / mosquito net	S
Installations	
Burners	2
Tank capacity : clear water / wastewater (l)	90/75
Compressor fridge (l)	70
Standard heating system	DIESEL 4kW
Space for 2 gas bottles (tot. Max 7 kg)	S
Bathroom window (double opaque glass)	S
Internal insulation material	POLYESTER FIBER AND ALUMINIUM
Floor thickness (mm)	36
Equipments	
Lifting roof with integrated double bed	O
Open space cabin	S
Cab carpet	S
Table extensions in dinette	S
Folding table	S
Storage under the dinette table	S
Internal LED lightening	S

S= standard O=optional
 The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.7 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

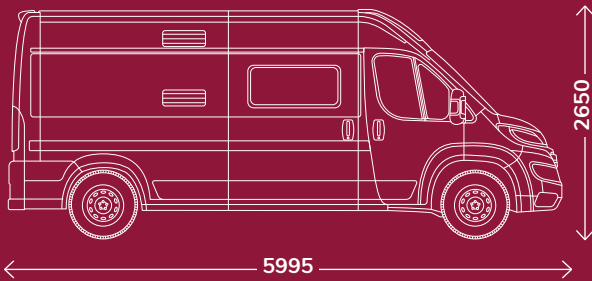

MENFYS 3 S-LINE

HOMOLOGATED SEATS	4
BERTHS	2



PACK

DRIVE PACK

- Entrance door flyscreen
- Electric step
- Cab pleated blind

SILVER PACK

- Solar panel
- Enclosure

LOOK PACK

- Black grille, headlights and skid plate
- 16" alloy wheel rims
- Techno Trim
- Leather steering wheel and gear knob

MEDIA PACK

- 7" touch screen radio, Android Auto / Apple Car Play with steering wheel controls
- Rear view camera

MEDIA PACK 10"

- 10" touch screen radio, Android Auto / Apple Car Play with steering wheel controls
- Rear view camera
- Automatic climate control system

MATIC PACK - Available starting from 140 HP


- Automatic transmission
- 16" alloy wheel rims

Chassis	
Engine, Power	2,2 MJ 120 HP
Maximum technically permissible weight (kg)	3300
Weight unladen in running conditions Min / Max (kg)	2865 / 2975
Pay Load Min / Max (kg)	435 / 325
Wheelbase (mm)	4035
Maximum towable weight (kg)	2500
Wheels dimensions	15"
Manual air conditioning	S
Driver and Passenger airbag	S
Cruise Control with speed limiter	S
ABS / ESC	S/S
Swivelling driver' and passenger's seat	S
Cab seat covers	S
Painted cab	WHITE
Painted front bumper	S
Dimensions and places	
External length (mm)	5995
External width (mm)	2050
External height(cm) / Internal height (cm)	265 / 189
Rear bed (cm)	186x149
Additional bed kit in dinette (cm)	O (188x120/50)
Beds with staves	S
Skylight	
Panoramic skylight 700x500 mm	S
400x400 mm skylight	S
Fixed, panorama roof in the cab	O
Openable rear windows	S
Double-glazed windows with blind / mosquito net	S
Installations	
Burners	2
Tank capacity : clear water / wastewater (l)	85 (20) / 90
Trivalent fridge (220V, 12V, gas) (l)	80
Standard heating system	DIESEL 4kW
Space for 2 gas bottles (tot. Max 7 kg)	S
Bathroom window (double opaque glass)	S
Internal insulation material	POLYESTER FIBER AND ALUMINIUM
Floor thickness (mm)	36
Equipments	
Lifting roof with integrated double bed	O
Open space cabin	S
Cab carpet	S
Table extensions in dinette	S
Folding table	S
Storage under the dinette table	S
Internal LED lightening	S

S= standard O=optional

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.7 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

MENFYS 3 MAXI S-LINE

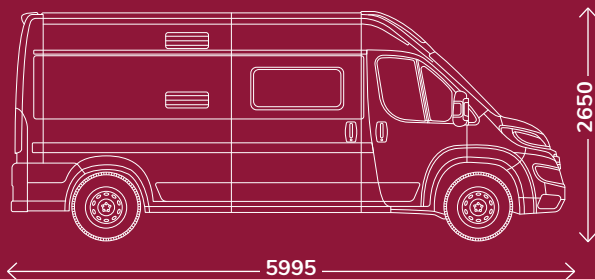

HOMOLOGATED SEATS	4
BERTHS	4



PACK

DRIVE PACK

- Entrance door flyscreen
- Electric step
- Cab pleated blind

SILVER PACK

- Solar panel
- Enclosure

LOOK PACK

- Black grille, headlights and skid plate
- 16" alloy wheel rims
- Techno Trim
- Leather steering wheel and gear knob

MEDIA PACK

- 7" touch screen radio, Android Auto / Apple Car Play with steering wheel controls
- Rear view camera

MEDIA PACK 10"

- 10" touch screen radio, Android Auto / Apple Car Play with steering wheel controls
- Rear view camera
- Automatic climate control system

MATIC PACK - Available starting from 140 HP

- Automatic transmission
- 16" alloy wheel rims

Chassis	
Engine, Power	2,2 MJ 120 HP
Maximum technically permissible weight (kg)	3300
Weight unladen in running conditions Min / Max (kg)	2885 / 2975
Pay Load Min / Max (kg)	415 / 325
Wheelbase (mm)	4035
Maximum towable weight (kg)	2500
Wheels dimensions	15"
Manual air conditioning	S
Driver and Passenger airbag	S
Cruise Control with speed limiter	S
ABS / ESC	S/S
Swivelling driver' and passenger's seat	S
Cab seat covers	S
Painted cab	WHITE
Painted front bumper	S
Dimensions and places	
External length (mm)	5995
External width (mm)	2050
External height(cm) / Internal height (cm)	265 / 189
Rear bed (cm)	186x144 - 184x133
Additional bed kit in dinette (cm)	O (188x120/50)
Beds with staves	S
Skylight	
Panoramic skylight 700x500 mm	S
400x400 mm skylight	S
Fixed, panorama roof in the cab	O
Openable rear windows	S
Double-glazed windows with blind / mosquito net	S
Installations	
Burners	2
Tank capacity : clear water / wastewater (l)	90 (20) / 90
Trivalent fridge (220V, 12V, gas) (l)	80
Standard heating system	DIESEL 4kW
Space for 2 gas bottles (tot. Max 7 kg)	S
Bathroom window (double opaque glass)	S
Internal insulation material	POLYESTER FIBER AND ALUMINIUM
Floor thickness (mm)	36
Equipments	
Lifting roof with integrated double bed	O
Open space cabin	S
Cab carpet	S
Table extensions in dinette	S
Folding table	S
Storage under the dinette table	S
Internal LED lightening	S

S= standard O=optional

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.7 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.



MENFYS 4 S-LINE

HOMOLOGATED SEATS	4
BERTHS	2



PACK

DRIVE PACK

- Entrance door flyscreen
- Electric step
- Cab pleated blind

SILVER PACK

- Solar panel
- Enclosure

LOOK PACK

- Black grille, headlights and skid plate
- 16" alloy wheel rims
- Techno Trim
- Leather steering wheel and gear knob

MEDIA PACK

- 7" touch screen radio, Android Auto / Apple Car Play with steering wheel controls
- Rear view camera

MEDIA PACK 10"

- 10" touch screen radio, Android Auto / Apple Car Play with steering wheel controls
- Rear view camera
- Automatic climate control system

MATIC PACK - Available starting from 140 HP

- Automatic transmission
- 16" alloy wheel rims

Chassis	
Engine, Power	2,2 MJ 140 HP
Maximum technically permissible weight (kg)	3500
Weight unladen in running conditions Min / Max (kg)	2975 / 3165
Pay Load Min / Max (kg)	525 / 335
Wheelbase (mm)	4035
Maximum towable weight (kg)	2500
Wheels dimensions	15"
Manual air conditioning	S
Driver and Passenger airbag	S
Cruise Control with speed limiter	S
ABS / ESC	S/S
Swivelling driver' and passenger's seat	S
Cab seat covers	S
Painted cab	WHITE
Painted front bumper	S
Dimensions and places	
External length (mm)	6365
External width (mm)	2050
External height(cm) / Internal height (cm)	265 / 189
Rear bed (cm)	195x80 - 186x80
Additional bed kit in dinette (cm)	O (188x120/50)
Beds with staves	S
Skylight	
Panoramic skylight 700x500 mm	S
400x400 mm skylight	S
Fixed, panorama roof in the cab	O
Openable rear windows	S
Double-glazed windows with blind / mosquito net	S
Installations	
Burners	2
Tank capacity : clear water / wastewater (l)	85 (20) / 90
Trivalent fridge (220V, 12V, gas) (l)	80
Standard heating system	DIESEL 4kW
Space for 2 gas bottles (tot. Max 7 kg)	S
Bathroom window (double opaque glass)	S
Internal insulation material	POLYESTER FIBER AND ALUMINIUM
Floor thickness (mm)	36
Equipments	
Lifting roof with integrated double bed	O
Open space cabin	S
Cab carpet	S
Table extensions in dinette	S
Folding table	S
Storage under the dinette table	S
Internal LED lightening	S

S= standard O=optional

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.7 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

MENFYS 4 MAXI S-LINE



HOMOLOGATED SEATS	4
BERTHS	2



PACK

DRIVE PACK

- Entrance door flyscreen
- Electric step
- Cab pleated blind

SILVER PACK

- Solar panel
- Enclosure

LOOK PACK

- Black grille, headlights and skid plate
- 16" alloy wheel rims
- Techno Trim
- Leather steering wheel and gear knob

MEDIA PACK

- 7" touch screen radio, Android Auto / Apple Car Play with steering wheel controls
- Rear view camera

MEDIA PACK 10"

- 10" touch screen radio, Android Auto / Apple Car Play with steering wheel controls
- Rear view camera
- Automatic climate control system

MATIC PACK - Available starting from 140 HP


- Automatic transmission
- 16" alloy wheel rims

Chassis	
Engine, Power	2,2 MJ 140 HP
Maximum technically permissible weight (kg)	3500
Weight unladen in running conditions Min / Max (kg)	2975 / 3165
Pay Load Min / Max (kg)	525 / 335
Wheelbase (mm)	4035
Maximum towable weight (kg)	2500
Wheels dimensions	15"
Manual air conditioning	S
Driver and Passenger airbag	S
Cruise Control with speed limiter	S
ABS / ESC	S/S
Swivelling driver' and passenger's seat	S
Cab seat covers	S
Painted cab	WHITE
Painted front bumper	S
Dimensions and places	
External length (mm)	6365
External width (mm)	2050
External height(cm) / Internal height (cm)	265 / 189
Rear bed (cm)	185(175) x 160(190)
Additional bed kit in dinette (cm)	O (188x120/50)
Beds with staves	S
Skylight	
Panoramic skylight 700x500 mm	S
400x400 mm skylight	S
Fixed, panorama roof in the cab	O
Openable rear windows	S
Double-glazed windows with blind / mosquito net	S
Installations	
Burners	2
Tank capacity : clear water / wastewater (l)	85 (20) / 90
Compressor fridge (l)	84
Standard heating system	DIESEL 4kW
Space for 2 gas bottles (tot. Max 7 kg)	S
Bathroom window (double opaque glass)	S
Internal insulation material	POLYESTER FIBER AND ALUMINIUM
Floor thickness (mm)	36
Equipments	
Lifting roof with integrated double bed	O
Open space cabin	S
Cab carpet	S
Table extensions in dinette	S
Folding table	S
Storage under the dinette table	S
Internal LED lightening	S


S= standard O=optional

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.7 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

MENFYS 1 PRESTIGE

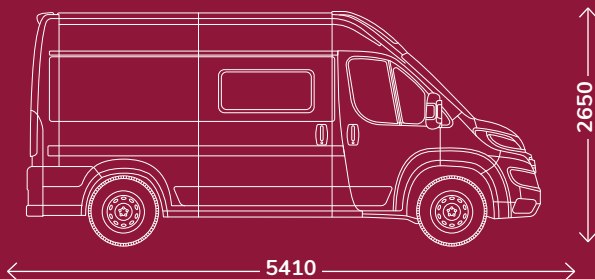

HOMOLOGATED SEATS	4
BERTHS	2

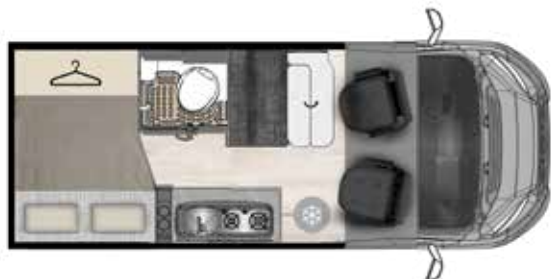

PACK

SILVER PACK

- Solar panel
- Enclosure

MEDIA PACK




- 7" touch screen radio, Android Auto / Apple Car Play with steering wheel controls
- Rear view camera

MEDIA PACK 10"

- 10" touch screen radio, Android Auto / Apple Car Play with steering wheel controls
- Rear view camera
- Automatic climate control system


MATIC PACK - Available starting from 140 HP

- Automatic transmission
- 16" alloy wheel rims

Chassis	
Engine, Power	2,2 MJ 120 HP
Maximum technically permissible weight (kg)	3300
Weight unladen in running conditions Min / Max (kg)	2865 / 2980
Pay Load Min / Max (kg)	435 / 320
Wheelbase (mm)	3450
Maximum towable weight (kg)	2500
Wheels dimensions	16"
Manual air conditioning	S
Driver and Passenger airbag	S
Cruise Control with speed limiter	S
ABS / ESC	S/S
Swivelling driver' and passenger's seat	S
Cab seat covers	S
Painted cab	WHITE
Painted front bumper	S
Dimensions and places	
External length (mm)	5410
External width (mm)	2050
External height(cm) / Internal height (cm)	265 / 189
Rear bed (cm)	186x132(116)
Additional bed kit in dinette (cm)	O (188x120/50)
Beds with staves	S
Skylight	
Panoramic skylight 700x500 mm	S
400x400 mm skylight	S
Fixed, panorama roof in the cab	O
Openable rear windows	S
Double-glazed windows with blind / mosquito net	S
Installations	
Burners	2
Tank capacity : clear water / wastewater (l)	90/75
Compressor fridge (l)	70
Standard heating system	COMBI DIESEL 4kW
Space for 2 gas bottles (tot. Max 7 kg)	S
Bathroom window (double opaque glass)	S
Internal insulation material	POLYESTER FIBER AND ALUMINIUM
Floor thickness (mm)	36
Equipments	
Lifting roof with integrated double bed	O
Open space cabin	S
Pleated cab blind	S
Cab carpet	S
Table extensions in dinette	S
Folding table	S
Sliding electrical step	S
Storage under the dinette table	S
Flyscreen for sliding door	S
Internal LED lightening	S
Exteriors	
External LED light	S

S= standard O=optional

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.7 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

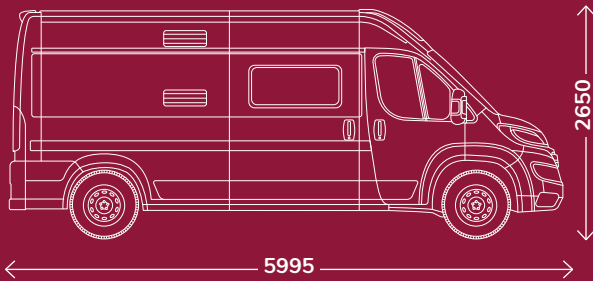

MENFYS 3 PRESTIGE

HOMOLOGATED SEATS	4
BERTHS	2



PACK

SILVER PACK

- Solar panel
- Enclosure

MEDIA PACK


- 7" touch screen radio, Android Auto / Apple Car Play with steering wheel controls
- Rear view camera

MEDIA PACK 10"

- 10" touch screen radio, Android Auto / Apple Car Play with steering wheel controls
- Rear view camera
- Automatic climate control system


MATIC PACK - Available starting from 140 HP

- Automatic transmission
- 16" alloy wheel rims

Chassis	
Engine, Power	2,2 MJ 120 HP
Maximum technically permissible weight (kg)	3300
Weight unladen in running conditions Min / Max (kg)	2865 / 2975
Pay Load Min / Max (kg)	435 / 325
Wheelbase (mm)	4035
Maximum towable weight (kg)	2500
Wheels dimensions	16"
Manual air conditioning	S
Driver and Passenger airbag	S
Cruise Control with speed limiter	S
ABS / ESC	S/S
Swivelling driver' and passenger's seat	S
Cab seat covers	S
Painted cab	WHITE
Painted front bumper	S
Dimensions and places	
External length (mm)	5995
External width (mm)	2050
External height(cm) / Internal height (cm)	265 / 189
Rear bed (cm)	186x149
Additional bed kit in dinette (cm)	O (188x120/50)
Beds with staves	S
Skylight	
Panoramic skylight 700x500 mm	S
400x400 mm skylight	S
Fixed, panorama roof in the cab	O
Openable rear windows	S
Double-glazed windows with blind / mosquito net	S
Installations	
Burners	2
Tank capacity : clear water / wastewater (l)	85 (20) / 90
Trivalent fridge (220V, 12V, gas) (l)	80
Standard heating system	COMBI DIESEL 4kW
Space for 2 gas bottles (tot. Max 7 kg)	S
Bathroom window (double opaque glass)	S
Internal insulation material	POLYESTER FIBER AND ALUMINIUM
Floor thickness (mm)	36
Equipments	
Lifting roof with integrated double bed	O
Open space cabin	S
Pleated cab blind	S
Cab carpet	S
Table extensions in dinette	S
Folding table	S
Sliding electrical step	S
Storage under the dinette table	S
Flyscreen for sliding door	S
Internal LED lightening	S
Exteriors	
External LED light	S

S= standard O=optional

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.7 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

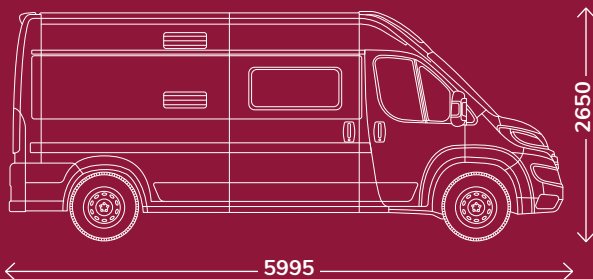

MENFYS 3 MAXI PRESTIGE

HOMOLOGATED SEATS	4
BERTHS	4



PACK

SILVER PACK

- Solar panel
- Enclosure

MEDIA PACK


- 7" touch screen radio, Android Auto / Apple Car Play with steering wheel controls
- Rear view camera

MEDIA PACK 10"

- 10" touch screen radio, Android Auto / Apple Car Play with steering wheel controls
- Rear view camera
- Automatic climate control system

MATIC PACK - Available starting from 140 HP

- Automatic transmission
- 16" alloy wheel rims

Chassis	
Engine, Power	2,2 MJ 120 HP
Maximum technically permissible weight (kg)	3300
Weight unladen in running conditions Min / Max (kg)	2885 / 2975
Pay Load Min / Max (kg)	415 / 325
Wheelbase (mm)	4035
Maximum towable weight (kg)	2500
Wheels dimensions	16"
Manual air conditioning	S
Driver and Passenger airbag	S
Cruise Control with speed limiter	S
ABS / ESC	S/S
Swivelling driver' and passenger's seat	S
Cab seat covers	S
Painted cab	WHITE
Painted front bumper	S
Dimensions and places	
External length (mm)	5995
External width (mm)	2050
External height(cm) / Internal height (cm)	265 / 189
Rear bed (cm)	186x144 - 184x133
Additional bed kit in dinette (cm)	O (188x120/50)
Beds with staves	S
Skylight	
Panoramic skylight 700x500 mm	S
400x400 mm skylight	S
Fixed, panorama roof in the cab	O
Openable rear windows	S
Double-glazed windows with blind / mosquito net	S
Installations	
Burners	2
Tank capacity : clear water / wastewater (l)	90 (20) / 90
Trivalent fridge (220V, 12V, gas) (l)	80
Standard heating system	COMBI DIESEL 4kW
Space for 2 gas bottles (tot. Max 7 kg)	S
Bathroom window (double opaque glass)	S
Internal insulation material	POLYESTER FIBER AND ALUMINIUM
Floor thickness (mm)	36
Equipments	
Lifting roof with integrated double bed	O
Open space cabin	S
Pleated cab blind	S
Cab carpet	S
Table extensions in dinette	S
Folding table	S
Sliding electrical step	S
Storage under the dinette table	S
Flyscreen for sliding door	S
Internal LED lightening	S
Exteriors	
External LED light	S

S= standard O=optional

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.7 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.

MENFYS 4 PRESTIGE



HOMOLOGATED SEATS	4
BERTHS	2



PACK

SILVER PACK

- Solar panel
- Enclosure

MEDIA PACK

STANDARD

- 7" touch screen radio, Android Auto / Apple Car Play with steering wheel controls
- Rear view camera

MEDIA PACK 10"

- 10" touch screen radio, Android Auto / Apple Car Play with steering wheel controls
- Rear view camera
- Automatic climate control system

MATIC PACK - Available starting from 140 HP

- Automatic transmission
- 16" alloy wheel rims

Chassis	
Engine, Power	2,2 MJ 140 HP
Maximum technically permissible weight (kg)	3500
Weight unladen in running conditions Min / Max (kg)	2975 / 3165
Pay Load Min / Max (kg)	525 / 335
Wheelbase (mm)	4035
Maximum towable weight (kg)	2500
Wheels dimensions	16"
Manual air conditioning	S
Driver and Passenger airbag	S
Cruise Control with speed limiter	S
ABS / ESC	S/S
Swivelling driver' and passenger's seat	S
Cab seat covers	S
Painted cab	WHITE
Painted front bumper	S
Dimensions and places	
External length (mm)	6365
External width (mm)	2050
External height(cm) / Internal height (cm)	265 / 189
Rear bed (cm)	195x80 - 186x80
Additional bed kit in dinette (cm)	O (188x120/50)
Beds with staves	S
Skylight	
Panoramic skylight 700x500 mm	S
400x400 mm skylight	S
Fixed, panorama roof in the cab	O
Openable rear windows	S
Double-glazed windows with blind / mosquito net	S
Installations	
Burners	2
Tank capacity : clear water / wastewater (l)	85 (20) / 90
Trivalent fridge (220V, 12V, gas) (l)	80
Standard heating system	COMBI DIESEL 4kW
Space for 2 gas bottles (tot. Max 7 kg)	S
Bathroom window (double opaque glass)	S
Internal insulation material	POLYESTER FIBER AND ALUMINIUM
Floor thickness (mm)	36
Equipments	
Lifting roof with integrated double bed	O
Open space cabin	S
Pleated cab blind	S
Cab carpet	S
Table extensions in dinette	S
Folding table	S
Sliding electrical step	S
Storage under the dinette table	S
Flyscreen for sliding door	S
Internal LED lightening	S
Exteriors	
External LED light	S

S= standard O=optional

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.7 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.



MENFYS 4 MAXI PRESTIGE

HOMOLOGATED SEATS	4
BERTHS	2



PACK

SILVER PACK

- Solar panel
- Enclosure

MEDIA PACK


- 7" touch screen radio, Android Auto / Apple Car Play with steering wheel controls
- Rear view camera

MEDIA PACK 10"

- 10" touch screen radio, Android Auto / Apple Car Play with steering wheel controls
- Rear view camera
- Automatic climate control system

MATIC PACK - Available starting from 140 HP

- Automatic transmission
- 16" alloy wheel rims

Chassis	
Engine, Power	2,2 MJ 140 HP
Maximum technically permissible weight (kg)	3500
Weight unladen in running conditions Min / Max (kg)	2975 / 3165
Pay Load Min / Max (kg)	525 / 335
Wheelbase (mm)	4035
Maximum towable weight (kg)	2500
Wheels dimensions	16"
Manual air conditioning	S
Driver and Passenger airbag	S
Cruise Control with speed limiter	S
ABS / ESC	S/S
Swivelling driver' and passenger's seat	S
Cab seat covers	S
Painted cab	WHITE
Painted front bumper	S
Dimensions and places	
External length (mm)	6365
External width (mm)	2050
External height(cm) / Internal height (cm)	265 / 189
Rear bed (cm)	185(175) x 160(190)
Additional bed kit in dinette (cm)	O (188x120/50)
Beds with staves	S
Skylight	
Panoramic skylight 700x500 mm	S
400x400 mm skylight	S
Fixed, panorama roof in the cab	O
Openable rear windows	S
Double-glazed windows with blind / mosquito net	S
Installations	
Burners	2
Tank capacity : clear water / wastewater (l)	85 (20) / 90
Compressor fridge (l)	84
Standard heating system	COMBI DIESEL 4kW
Space for 2 gas bottles (tot. Max 7 kg)	S
Bathroom window (double opaque glass)	S
Internal insulation material	POLYESTER FIBER AND ALUMINIUM
Floor thickness (mm)	36
Equipments	
Lifting roof with integrated double bed	O
Open space cabin	S
Pleated cab blind	S
Cab carpet	S
Table extensions in dinette	S
Folding table	S
Sliding electrical step	S
Storage under the dinette table	S
Flyscreen for sliding door	S
Internal LED lightening	S
Exteriors	
External LED light	S

S= standard O=optional

The mass in running order includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and aluminium gas cylinders (max.7 kg) filled to 90% of their capacity, and tolerance specified in the type-approval (+/- 5%) (2007/46/EC). Anything not included in the standard version of the vehicle, both living unit and chassis, results in an increase in weight in running order with resulting decreased payload up to the possible reduction of approved seats in the case of the total weight for the available payload value. The available payloads result from the difference between maximum permissible mass and running order mass and have a tolerance of 5%. During the purchase phase it is necessary to check the weight of the options to be installed on the vehicle.



The masses indicated in the technical data sheets refer to the provisions of European Directive 2007/46/EC.

MASS IN RUNNING ORDER

It includes the weight of the empty base vehicle, of the driver (75 kg), 100% of the fuel (60-l tank), fresh water (tank filled with 20 l while travelling), and a gas tank for living purposes (20 kg). The mass in running order, and consequently the payload and/or certified seats may vary depending on the accessories installed.

PAYLOAD

This consists of the difference between the maximum technically permissible laden mass and the mass in running order. It includes elements for living purposes, the transported passengers defined by the manufacturer (driver excluded), and the personal effects.

The payload calculation is based on the following parameters: 75 kg for each passenger (driver excluded), 10 kg of baggage for each passenger and for the driver, 10 kg for each metre of length of the vehicle, plus the remaining payload, which can be used for the installation of accessories or for additional baggage.

All masses and loads of the empty vehicle have a tolerance of +/- 5%, in compliance with Directive 2007/46/EC.

Any optional equipment increases the mass in running order and decreases the payload.

The weight of non-standard accessories is not included in the mass in running order indicated in this catalogue. Additional accessories and devices reduce the payload by a quantity equal to their weight; the incidence of the weight of the individual accessories is shown in the special column in the technical data sheets or can be requested at our dealers. In case certain accessories are installed (for example, additional elements such as coupling device or motorbike rack), the mass of these accessories will affect the payload, possibly reducing it along with the number of certified seats. Please note that the law does not allow the maximum permissible mass to be exceeded, which can be consulted under the specific heading of the data sheets. Please make sure that the maximum loads on the axles and the maximum technically permissible load mass are not exceeded during the complete loading phase of the vehicle. The regulations and requirements of each country may entail changes in the characteristics of this table. The number of certified seats may vary depending on the traffic regulations in force in each country. When driving, the fresh water tank must be filled to a maximum of 20 litres.